

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number
WO 2004/071072 A1

(51) International Patent Classification⁷: H04N 1/40, 1/46

(21) International Application Number:

PCT/JP2004/001145

(22) International Filing Date: 4 February 2004 (04.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003-028668 5 February 2003 (05.02.2003) JP

(71) Applicant (for all designated States except US): CANON KABUSHIKI KAISHA [JP/JP]; 3-30-2, Shimomaruko, Ohta-ku, , Tokyo 1468501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): SHIMADA, Takuya [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, , Tokyo 1468501 (JP).

(74) Agent: OHTSUKA, Yasunori; Shuwa Kioicho Park Bldg., 7th Fl.,3-6, Kioicho, Chiyoda-ku, Tokyo, 1020094 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(48) Date of publication of this corrected version:

13 January 2005

[Continued on next page]

(54) Title: COLOR CONVERSION METHOD AND PROFILE GENERATION METHOD

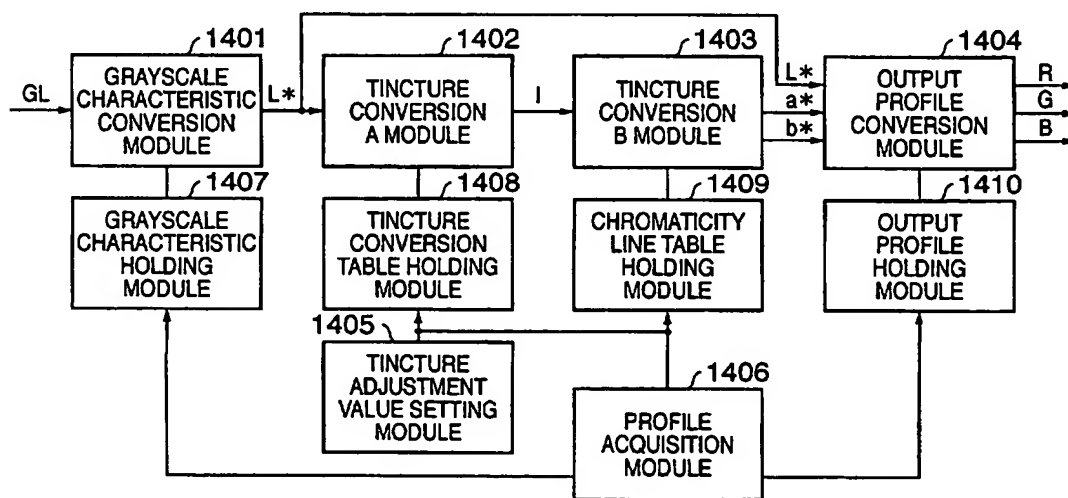

(57) Abstract: A tincture adjustment value used to adjust a monochrome signal to a tincture desired by a user is set, and a tincture conversion table and chromaticity line table are generated based on that tincture adjustment value and the profile of an image output apparatus. Using the generated tables, a lightness signal L^* corresponding to an input monochrome signal is converted into a distance signal l on a chromaticity line, and the distance signal l is converted into a chromaticity signal (a^* , b^*). The lightness signal L^* and chromaticity signal (a^* , b^*) are converted into a color signal of the image output apparatus.

WO 2004/071072 A1



(15) Information about Correction:

see PCT Gazette No. 02/2005 of 13 January 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number
WO 2004/071072 A1

(51) International Patent Classification⁷: **H04N 1/40, 1/46**

(21) International Application Number:

PCT/JP2004/001145

(22) International Filing Date: 4 February 2004 (04.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003-028668 5 February 2003 (05.02.2003) JP

(71) Applicant (for all designated States except US): **CANON KABUSHIKI KAISHA** [JP/JP]; 3-30-2, Shimomaruko, Ohta-ku, , Tokyo 1468501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SHIMADA, Takuya** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, , Tokyo 1468501 (JP).

(74) Agent: **OHTSUKA, Yasunori**; Shuwa Kioicho Perk Bldg., 7th Fl., 3-6, Kioicho, Chiyoda-ku, Tokyo, 1020094 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COLOR CONVERSION METHOD AND PROFILE GENERATION METHOD

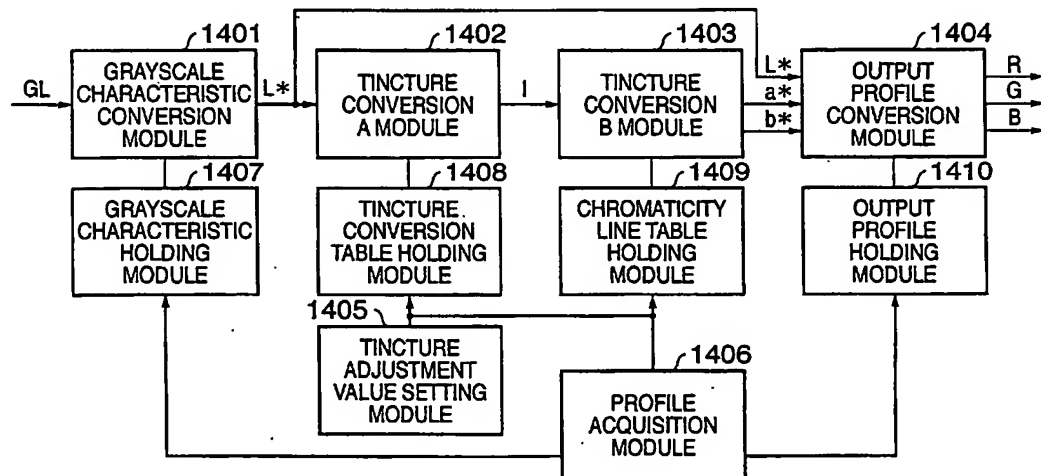

(57) Abstract: A tincture adjustment value used to adjust a monochrome signal to a tincture desired by a user is set, and a tincture conversion table and chromaticity line table are generated based on that tincture adjustment value and the profile of an image output apparatus. Using the generated tables, a lightness signal L^* corresponding to an input monochrome signal is converted into a distance signal l on a chromaticity line, and the distance signal l is converted into a chromaticity signal (a^* , b^*). The lightness signal L^* and chromaticity signal (a^* , b^*) are converted into a color signal of the image output apparatus.

DESCRIPTION

COLOR CONVERSION METHOD AND PROFILE GENERATION METHOD

TECHNICAL FIELD

5 The present invention relates to a technique for converting an input monochrome signal into color signals of an image output apparatus.

BACKGROUND ART

10 In recent years, use of digital color images has increased abruptly along with the popularization of digital cameras. Photo print techniques for satisfactorily printing these images have been extensively developed. On the other hand, in the field
15 of silver halide photos, it has been prevalent to take monochrome photos using vintage cameras. Monochrome photos, unlike color photos, express an object's texture by subtle flavor and expressive power, are used as an expressive means different from that of color
20 photos. Digital monochrome images are not so currently prevalent compared to color photos. If digital cameras are used as the same expression means as monochrome photos in the future, however, expansion of the usage of digital monochrome images are expected.

25 In general, a monochrome image is printed by forming an image using a black color agent (ink or toner). When an image is formed using a black color

agent alone, however, the color characteristics of the black color agent practically determine the tincture of a printed image. Hence, the tincture of a printed image cannot be controlled in order to be reproduced
5 desirably.

A monochrome image is also often formed by a so-called "composite black", using color agents such as, inter alia, cyan (hereinafter abbreviated as C), magenta (hereinafter abbreviated as M), yellow
10 (hereinafter abbreviated as Y), in addition to black (hereinafter abbreviated as K). In these cases, by combining color agents at an appropriate ratio, the tincture of a monochrome image can be desirably reproduced. Also, by changing the ratio of combined
15 color agents, the tincture can be adjusted.

Furthermore, when a color printer is used to print a monochrome image, the tincture cannot be adjusted unless the printer has a special adjustment function. Hence, when a monochrome image is outputted
20 with a desired tincture, image data is converted into R, G, and B color component signals, which are to be adjusted.

In the above prior art, however, when the tincture is adjusted by adjusting the color agent
25 amounts or color component signal values, because the relationship between the adjustment amounts and print colors is not always constant, an unexpected adjustment

result is often obtained. Some adjustment may also lose a tincture balance at a specific gray level, and the tincture may disproportionately appear. For example, when a tinge of yellow is to be enhanced by increasing the amount of a Y color agent or decreasing a B signal value, the tincture of middle lightness has nearly no change, but an image with excessively yellowish highlight may be formed. Furthermore, some adjustment may often change the brightness of an image.

10

DISCLOSURE OF INVENTION

The present invention has been made to solve the aforementioned problems, and has as its object to generate a profile used to print a monochrome image with a tincture of user's choice without any color deviation.

It is another object of the present invention to convert monochrome image data into color image data that can be printed with a desired tincture without biasing colors upon printing the monochrome image data by a designated image output apparatus.

In order to achieve the above objects, according to one aspect of the present invention, there is provided a color conversion method for converting an input monochrome signal into a color signal on a predetermined color space, comprising: a setting step of setting a tincture adjustment value used to adjust

the input monochrome signal to a desired tincture of a user; an acquisition step of acquiring color reproduction characteristics which depend on an image output apparatus and a recording medium; a first
5 conversion step of converting the input monochrome signal into a first color signal using the color reproduction characteristics acquired in the acquisition step; a second conversion step of converting the first color signal converted in the
10 first conversion step into a second color signal using the tincture adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step; a third conversion step of converting the second color signal converted in the
15 second conversion step into a third color signal; and an output step of forming and outputting a color signal on the color space on the basis of the third color signal converted in the third conversion step and the first color signal converted in the first conversion
20 step.

According to one aspect of the present invention, there is provided a profile generation method for generating a profile which stores a relationship between monochrome signals and color signals on a
25 predetermined color space, comprising: a setting step of setting a tincture adjustment value used to adjust monochrome signals to a desired tincture of a user; an

acquisition step of acquiring color reproduction characteristics which depend on an image output apparatus and a recording medium; a generation step of generating discrete monochrome signals; a first
5 conversion step of converting the monochrome signals generated in the generation step into first color signals using the color reproduction characteristics acquired in the acquisition step; a second conversion step of converting the first color signals converted in
10 the first conversion step into second color signals using the tincture adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step; a third conversion step of converting the second color signals converted
15 in the second conversion step into third color signals; and a profile generation step of generating a profile on the basis of the third color signals converted in the third conversion step and the first color signals converted in the first conversion step.

20 According to one aspect of the present invention, there is provided an image conversion method for converting input monochrome image data into color image data for an image output apparatus designated by a user, comprising: a setting step of setting a tincture
25 adjustment value used to adjust the input monochrome image data to a desired tincture of a user; an acquisition step of acquiring color reproduction

characteristics which depend on the image output apparatus and a recording medium; a first conversion step of converting monochrome signals which form the input monochrome image data into first color signals
5 using the color reproduction characteristics acquired in the acquisition step; a second conversion step of converting the first color signals converted in the first conversion step into second color signals using the tincture adjustment value set in the setting step
10 and the color reproduction characteristics acquired in the acquisition step; a third conversion step of converting the second color signals converted in the second conversion step into third color signals; and a conversion step of converting the third color signals
15 converted in the third conversion step and the first color signals converted in the first conversion step into color image data for the image output apparatus, and outputting the color image data.

According to one aspect of the present invention,
20 there is provided an image processing apparatus for converting an input monochrome signal into a color signal on a predetermined color space, and outputting the color signal, comprising: setting means for setting a tincture adjustment value used to adjust the
25 input monochrome signal to a desired tincture of a user; acquisition means for acquiring color reproduction characteristics which depend on an image

output apparatus and a recording medium; first
conversion means for converting the input monochrome
signal into a first color signal using the color
reproduction characteristics acquired by the
5 acquisition means; second conversion means for
converting the first color signal converted by the
first conversion means into a second color signal using
the tinture adjustment value set by the setting means
and the color reproduction characteristics acquired by
10 the acquisition means; third conversion means for
converting the second color signal converted by the
second conversion means into a third color signal; and
output means for forming and outputting a color signal
on the color space on the basis of the third color
15 signal converted by the third conversion means and the
first color signal converted by the first conversion
means.

According to one aspect of the present invention,
there is provided an image processing apparatus for
20 generating a profile which stores a relationship
between monochrome signals and color signals on a
predetermined color space, comprising: setting means
for setting a tinture adjustment value used to adjust
monochrome signals to a desired tinture of a user;
25 acquisition means for acquiring color reproduction
characteristics which depend on an image output
apparatus and a recording medium; generation means for

generating discrete monochrome signals; first
conversion means for converting the monochrome signals
generated by the generation means into first color
signals using the color reproduction characteristics
5 acquired by the acquisition means; second conversion
means for converting the first color signals converted
by the first conversion means into second color signals
using the tincture adjustment value set by the setting
means and the color reproduction characteristics
10 acquired by the acquisition means; third conversion
means for converting the second color signals converted
by the second conversion means into third color
signals; and profile generation means for generating a
profile on the basis of the third color signals
15 converted by the third conversion means and the first
color signals converted by the first conversion means.

According to one aspect of the present invention,
there is provided an image processing apparatus for
converting input monochrome image data into color image
20 data for an image output apparatus designated by a user,
and outputting the color image data, comprising:
setting means for setting a tincture adjustment value
used to adjust the input monochrome image data to a
desired tincture of a user; acquisition means for
25 acquiring color reproduction characteristics which
depend on the image output apparatus and a recording
medium; first conversion means for converting

monochrome signals which form the input monochrome image data into first color signals using the color reproduction characteristics acquired by the acquisition means; second conversion means for
5 converting the first color signals converted by the first conversion means into second color signals using the tinture adjustment value set by the setting means and the color reproduction characteristics acquired by the acquisition means; third conversion means for
10 converting the second color signals converted by the second conversion means into third color signals; and conversion means for converting the third color signals converted by the third conversion means and the first color signals converted by the first conversion means
15 into color image data for the image output apparatus, and outputting the color image data.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying
20 drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF DRAWINGS

25 Fig. 1 is a view for explaining an overview of a color management system (CMS);

Fig. 2 is a block diagram showing an example of an image output system using a CMS;

Fig. 3 is a block diagram showing the basic arrangement of an image processing apparatus in the first embodiment;

Fig. 4 is a block diagram showing the functional arrangement of the image processing apparatus in the first embodiment;

Fig. 5 shows an example of grayscale characteristics stored in a grayscale characteristic holding module 408;

Fig. 6 shows an example of the relationship between a monochrome signal GL and lightness L^* ;

Fig. 7 shows an example of a tincture conversion table stored in a tincture conversion table holding module 409;

Fig. 8 illustrates a chromatic point path projected onto an a^*b^* chromaticity plane on the CIELAB color space;

Fig. 9 shows an example of the relationship between lightness values L^* and distance signals l , which form the tincture conversion table shown in Fig. 7;

Fig. 10 shows an example of a chromaticity line table stored in a chromaticity line table holding module 410;

Fig. 11 shows an example of a UI used to set a gray chromaticity point;

Fig. 12 shows an example of a UI used to a chromaticity point change rate;

5 Fig. 13 is a flow chart showing the profile generation sequence in the first embodiment;

Fig. 14 is a block diagram showing the functional arrangement of an image processing apparatus in the second embodiment;

10 Fig. 15 shows an example of an output profile stored in an output profile holding module 1410;

Fig. 16 shows an example of a color patch image in the second embodiment;

15 Fig. 17 is a flow chart showing the image processing sequence in the second embodiment;

Fig. 18 is a block diagram partially showing the functional arrangement of the image processing apparatus in a modification of the first and second embodiments;

20 Fig. 19 is a block diagram showing the arrangement of an image processing apparatus and its peripheral devices in the third embodiment;

Fig. 20 is a block diagram showing the basic arrangement of an image processing apparatus 1900 in
25 the third embodiment;

Fig. 21 is a block diagram showing the functional arrangement of an image processing unit 1920 shown in Fig. 19;

Fig. 22 shows an example of an output profile stored in an output profile holding module 2110;

Fig. 23 shows an example of a color separation LUT stored in a color separation LUT holding module 2111;

Fig. 24 is a flow chart showing the image processing sequence in the third embodiment;

Fig. 25 shows an example of a UI used to set a gray chromaticity point in a modification;

Fig. 26 shows an example of a UI used to set a change rate of a chromaticity point in a modification; and

Fig. 27 is a block diagram showing the functional arrangement of an image processing unit in a modification of the third embodiment.

BEST MODE FOR CARRYING OUT THE INVENTION

Preferred embodiments of the present invention will be described in detail hereinafter with reference to the accompanying drawings.

[First Embodiment]

The first embodiment will exemplify an image processing apparatus which generates a profile used to print an input monochrome image in a desired color

without any tincture deviation in a print process using a color management system (hereinafter referred to as a CMS).

<CMS>

5 Fig. 1 is a view for explaining an overview of the CMS. The CMS is primarily a color processing technique that allows a plurality of image input/output apparatuses (e.g., a color copy 101, color monitor 102, digital camera 103, color printer 104, and the like) to
10 satisfactorily reproduce an identical color image. According to the CMS, a color signal of an input system is converted into that of an output system. More specifically, an input color signal depending on an input system apparatus is converted into a signal on a
15 color match color space, which is independent of any apparatuses using a predetermined conversion formula or table that pertains to the input system apparatus. The predetermined conversion formula or table used to mutually convert a signal on the color space depending
20 on a given apparatus and a signal on the color match color space in this way is called a "profile" of that apparatus. The converted signal on the color match color space undergoes a predetermined color process to obtain a signal value to be output. The signal value
25 is then converted into a signal on a color space depending on each apparatus of an output system with reference to a profile of that apparatus.

As described above, according to the CMS, because a color signal is converted between the color space depending on each apparatus and the color match color space, color matching among a plurality of apparatuses
5 can be realized.

Fig. 2 is a block diagram showing an example of an image output system using the CMS. In the image output system shown in Fig. 2, R, G, and B color signals that form image data are converted into C, M, Y,
10 and K color signals of a connected image output apparatus by an input profile conversion unit 201, color mapping unit 202, output profile conversion unit 203, and color separation conversion unit 204.

The input profile conversion unit 201 converts
15 input R, G, and B color signals into L^* , a^* , and b^* color signals on a CIELAB color space on the basis of the profile which is stored in an input profile storage unit 205 and represents the color reproduction characteristics of an image input apparatus. The input
20 profile storage unit 205 stores L^* , a^* , and b^* color signals corresponding to discrete R, G, and B color signals as a three-dimensional (3D) lookup table (to be abbreviated as an LUT hereinafter). The input profile conversion unit 201 converts the input R, G, and B
25 color signals into L^* , a^* , and b^* color signals on the CIELAB color space by a known method using that 3D LUT.

The color mapping unit 202 converts L, a, and b input signals into L', a', and b' color signals which can be reproduced by the image output apparatus. In this way, when the image input apparatus and image
5 output apparatus have different color gamuts, the color mapping unit 202 can absorb their differences. When the image input apparatus and image output apparatus have equal color gamuts, the input color signals are directly output.

10 The output profile conversion unit 203 converts input L', a', and b' color signals into R', G', and B' color signals depending on the image output apparatus on the basis of a profile which is stored in an output profile storage unit 206 and represents the color
15 reproduction characteristics of the image output apparatus. Note that the output profile storage unit 206 typically stores L', a', and b' color signals corresponding to discrete R', G', and B' color signals as a 3D LUT. The output profile conversion unit 203
20 searches that 3D LUT for data near the input L', a', and b' color signals, and calculates output R', G', and B' color signals on the basis of the found data and the input color signals using a known interpolation method.

The color separation conversion unit 204 converts
25 the input R', G', and B' color signal into output C, M, Y, and K color signals by a known method using a color separation LUT stored in a color separation LUT storage

unit 207. Then, a print image corresponding to the input image data is formed by the image output apparatus (not shown) on the basis of the C, M, Y, and K color signals.

5 In this way, in the image output system using the aforementioned CMS, each of print colors corresponding to the input image data is determined by the input profile stored in the input profile storage unit 205. The image processing apparatus of the first embodiment
10 generates an input profile used to print a monochrome image with a tincture of user's choice without any tincture deviation upon printing that monochrome image in the image output system using the CMS.

<Basic Arrangement>

15 Fig. 3 is a block diagram showing the basic arrangement of the image processing apparatus in the first embodiment. Referring to Fig. 3, reference numeral 301 denotes a CPU, which controls the overall apparatus using programs and data stored in a RAM and
20 ROM (to be described below), and also executes image processes (to be described later). Reference numeral 302 denotes a RAM which comprises an area for temporarily storing programs and data loaded from an external storage device or recording medium drive, and
25 various data whose processes are underway, and also a work area used when the CPU 301 executes respective processes. Reference numeral 303 denotes a ROM which

stores programs, control data, and the like required to control the overall apparatus.

Reference numeral 304 denotes an operation unit, which comprises a keyboard and a pointing device such as a mouse, and can input, among others, a gray tincture adjustment instruction, output profile designation, to this apparatus (to be described later). Reference numeral 305 denotes a display unit which comprises a CRT, liquid crystal display, etc, and displays various adjustment user interfaces (UIs; to be described later), images, and text. Reference numeral 306 denotes an external storage device which saves an operating system (OS), and an image processing program 307 and parameters 308 required to implement various image processes. Reference numeral 309 denotes a recording medium drive, which reads various data including image data from a recording medium, and outputs them to the external storage device 306 and RAM 302. Also, the storage medium drive 309 saves a generated profile. Reference numeral 310 denotes a bus which interconnects the aforementioned units.

<Functional Arrangement>

Fig. 4 is a block diagram showing the functional arrangement of the image processing apparatus in the first embodiment. As shown in Fig. 4, the apparatus comprises, as the functional arrangement, a color signal generation module 401, grayscale characteristic

conversion module 402, tinture conversion A module 403, tinture conversion B module 404, format module 405, profile acquisition module 406, tinture adjustment value setting module 407, grayscale characteristic
5 holding module 408, tinture conversion table holding module 409, and chromaticity line table holding module 410.

In this arrangement, the color signal generation module 401 generates discrete monochrome signals GL.
10 The grayscale characteristic conversion module 402 converts the monochrome signals GL into print image lightness values L^* , obtained when the monochrome signals GL are output by the image output apparatus on the basis of grayscale characteristics stored in the
15 grayscale characteristic holding module 408.

Fig. 5 shows an example of the grayscale characteristics stored in the grayscale characteristic holding module 408. The grayscale characteristics are stored as a correspondence table of lightness values L^*
20 in association with discrete monochrome signals GL, and are associated print image with brightness. Note that a lightness value L^* corresponding to an arbitrary monochrome signal GL is calculated by a known interpolation operation on the basis of the grayscale
25 characteristics.

Fig. 6 shows an example of the relationship between the monochrome signal GL and lightness L^* .

Referring to Fig. 6, the monochrome signal GL is an 8-bit signal. Lmax represents a lightness value L* which normally corresponds to a maximum value (to be referred to as a white signal hereinafter) GL = 255 of the monochrome signal GL, and Lmin represents a lightness value L* which corresponds to a minimum value (to be referred to as a black signal) GL = 0 of the monochrome signal GL. The values Lmax and Lmin are acquired by the profile acquisition module 406 (to be described later). A lightness value L* corresponding to a monochrome signal GL which meets $0 < GL$ and $GL < 255$ is preferably determined on the basis of the values Lmax and Lmin and desired grayscale characteristics.

The tinture conversion A module 403 converts each lightness value L* as an input signal into a distance signal l on a chromaticity space (to be described later) on the basis of a tinture conversion table stored in the tinture conversion table holding module 409.

Fig. 7 shows an example of the tinture conversion table stored in the tinture conversion table holding module 409. This tinture conversion table is a correspondence table of distance signals l in association with discrete lightness values L*, and is associated with the tinture of a print image. A distance signal l corresponding to an arbitrary lightness value L* is calculated by a known

interpolation operation on the basis of this tincture conversion table.

The distance signal 1 and a chromaticity point path (gray line) of the monochrome signal in the profile to be generated will be described in detail below using Fig. 8.

Fig. 8 illustrates the chromaticity point path projected onto an a^*b^* chromaticity plane on the CIELAB color space. Referring to Fig. 8, a point W is a chromaticity point of a print color (white print color) corresponding to the white signal, and a point K is a chromaticity point of a print color (black print color) corresponding to the black signal. The chromaticity points (points W and K) of white and black print colors are acquired by the profile acquisition module 406 (to be described later). A point G is a chromaticity point (gray chromaticity point) of a middle lightness value, which is designated by an adjustment instruction from the tincture adjustment value setting module 407 (to be described later).

When a profile is generated so that the gray line passes the gray chromaticity point (point G) designated by the adjustment instruction, as shown in Fig. 8, a monochrome print image with a tincture based on user's intention can be obtained.

This distance signal 1 indicates a distance along the gray line when the point W is a starting point, and

a signal value corresponding to each chromaticity point on the gray line, as shown in Fig. 8. For example, a distance signal lg corresponding to the point G indicates a distance between the points W and G along the gray line, and a distance signal lk corresponding to the point K indicates the sum of the distance signal lg and a distance between the points G and K along the gray line. Also, a distance signal corresponding to the point W is zero.

10 Details of the tincture conversion process in the tincture conversion A module 403 shown in Fig. 4 will be described below using Fig. 9.

Fig. 9 shows an example of the relationship between the lightness values L^* and distance signals l , which form the tincture conversion table shown in Fig. 7. Referring to Fig. 9, lightness L_{min} indicates the lightness value of the black print color. The chromaticity point of that black print color is the point K shown in Fig. 8, and a distance signal l corresponding to lightness L_{min} is the distance signal lk in the above example. On the other hand, lightness L_{max} is the lightness value of the white print color. The chromaticity point of that white print color is the point W shown in Fig. 8, and a distance signal l corresponding to lightness L_{max} is zero, as described above. A distance signal l corresponding to a middle lightness part (L^* that satisfies $L_1 < L^* \text{ and } L^* < L_2$

15

20

25

in Fig. 9) is the distance signal lg corresponding to the chromaticity point G shown in Fig. 8. In the first embodiment, by generating a profile so that the chromaticity point of the middle lightness part matches
5 the gray chromaticity point (point G shown in Fig. 8) designated by the adjustment instruction, a monochrome print image with a tincture based on user's intention can be obtained.

Suppression of tincture changes in highlight and
10 shadow parts will be described below using Fig. 9. Referring to Fig. 9, when the aforementioned middle lightness part has a broad lightness range (i.e., $L2 - L1$ is large) most of input monochrome signals except for highlight and shadow are reproduced based on the
15 chromaticity point (point G shown in Fig. 8) designated by the adjustment instruction. In this case, however, because the change rate of the distance signal l associated with lightness (i.e., that of the chromaticity point is large in a high lightness part
20 near the white print color and a low lightness part near the black print color) tincture changes are observed in, among others, gradation images.

In the first embodiment, since the tincture adjustment value setting module 407 (to be described
25 later) issues an adjustment instruction of the change rate of the chromaticity point, Φ and θ (angles line segments indicated by the tincture conversion table and

a straight line parallel to the L^* axis make respectively in the high and low lightness parts) in Fig. 9 are appropriately set, thus generating a profile which suppresses tincture changes of a print image.

5 The tincture conversion B module 404 shown in Fig. 4 converts each distance signal l as an input signal into a chromaticity coordinate signal (a^* , b^*) on the CIELAB color space on the basis of a chromaticity line table stored in the chromaticity line
10 table holding module 410.

Fig. 10 shows an example of the chromaticity line table stored in the chromaticity line table holding module 410. This chromaticity line table is formed by extracting the relationship between distance signals l
15 on the gray line shown in Fig. 8 and chromaticity coordinates (a^* , b^*) in association with discrete distance signals l . A chromatic coordinate signal (a^* , b^*) corresponding to an arbitrary distance signal l is calculated by a known interpolation operation on the
20 basis of this chromaticity line table.

The format module 405 converts the input L^* , a^* , and b^* signals into a prescribed format, thus generating a profile. This profile is made up of a 3D LUT (L^* , a^* , and b^* color signals corresponding to
25 discrete R, G, and B color signals), and various kinds of header information. When R, G, and B color signals have equal color signal values ($R = G = B$), the 3D LUT

stores L*, a*, and b* color signals on the basis of the outputs from the grayscale characteristic conversion module 402 and tinture conversion B module 404 when the color signal generation module 401 generates the
5 corresponding monochrome color signals (GL = R = G = B). For other R, G, and B color signals, the 3D LUT stores dummy L*, a*, and b* color signals.

The profile acquisition module 406 acquires an output profile of the image output apparatus, and then
10 acquires L*, a*, and b* color signals of white and black print colors, which depend on that image output apparatus and an image recording medium (print paper). The acquired L*, a*, and b* color signals of white and black print colors are used by the grayscale
15 characteristic holding module 408 and the tinture adjustment value setting module 407 (to be described below).

The aforementioned tinture adjustment value setting module 407 sets the tinture conversion table
20 to be stored in the tinture conversion table holding module 409 and the chromaticity line table to be stored in the chromaticity line table holding module 410 on the basis of the chromaticity points of the white and black print colors acquired by the profile acquisition
25 module 406, and a gray chromaticity point (point G shown in Fig. 8) and chromaticity point change rate

(values associates with Φ and θ shown in Fig. 9), which are set using the UIs to be described later.

The first embodiment can generate a profile required to obtain a monochrome print image with a
5 tincture based on user's intention, since it comprises
of means for setting the gray chromaticity point and
chromaticity point change rate.

<UI>

Figs. 11 and 12 show examples of tincture
10 adjustment value setting user interfaces (UIs) in the
first embodiment. Fig. 11 shows an example of a UI
used to set the gray chromaticity point. As shown in
Fig. 11, this UI includes a text box 1101 used to set
an a^* value of the CIELAB color space, a text box 1102
15 used to set a b^* value, an OK button 1103, and a cancel
button 1104. The a^* and b^* values of the gray
chromaticity point corresponding to the point G shown
in Fig. 8 are input to the text boxes 1101 and 1102.
When the user selects the OK button 1103, the input
20 chromaticity point is set, and the corresponding
chromaticity line table and tincture conversion table
are respectively stored in the chromaticity line table
holding module 410 and tincture conversion table
holding module 409. When the user selects the cancel
25 button 1104, the setting values are canceled, and the
chromaticity line table and tincture conversion table
are not updated.

Fig. 12 shows an example of a UI used to set the chromaticity point change rate. As shown in Fig. 12, this UI includes a text box 1201 used to set a chromaticity change rate of a highlight part, a text box 1202 used to set a chromaticity change rate of a shadow part, an OK button 1203, and a cancel button 1204. A change rate per unit lightness (L^*) of the aforementioned distance signal 1 is inputted into each text box. Let H_{in} be the value to be inputted into the text box 1201, and S_{in} be the value to be inputted into the text box 1202. Then, Φ and θ shown in Fig. 9, and H_{in} and S_{in} respectively have the following relationships:

$$\Phi = \tan^{-1}(S_{in})$$

$$\theta = \tan^{-1}(H_{in})$$

When the user selects the OK button 1203, Φ and θ corresponding to the input values are set on the basis of the above equations, and the corresponding tincture conversion table is stored in the tincture conversion table holding module 409. On the other hand, when the user selects the cancel button 1204, setting values are canceled, and the tincture conversion table is not updated.

<Image Processing Sequence>

Fig. 13 is a flow chart showing the profile generation sequence in the first embodiment. This

profile generation process is executed in the following sequence.

In step S1301, an output profile is set. In this output profile setting process, the output profile of
5 the image output apparatus is acquired, and L^* , a^* , and b^* color signals of white and black print colors, which depend on that image output apparatus and an image recording medium (print paper) are acquired.
Furthermore, corresponding grayscale characteristics
10 are stored in the aforementioned grayscale characteristic holding module 408 on the basis of the acquired L values of the white and black print colors.
In step S1302, tinture adjustment values are set. In this tinture adjustment value setting process, a
15 corresponding tinture conversion table and chromaticity line table are respectively stored in the aforementioned tinture conversion table holding module 409 and chromaticity line table holding module 410 on the basis of the image output apparatus and image
20 recording medium (print paper or the like), and the gray chromaticity point and chromaticity point change rate set by the aforementioned tinture adjustment value setting module 407.

In step S1303, the aforementioned color signal
25 generation module 401 generates a discrete monochrome signal GL which forms a 3D LUT to be stored in a profile. In step S1304, the aforementioned grayscale

characteristic conversion module 402 converts the monochrome signal GL into a lightness value L^* . In step S1305, the aforementioned tinture conversion A module 403 converts the lightness value L^* into a distance function l . In step S1306, the aforementioned tinture conversion B module 404 converts the distance function l into a chromaticity coordinate signal (a^* , b^*) on the CIELAB color space.

It is checked in step S1307 if the processes of all monochrome signals which form the 3D LUT of the profile are complete. If signals to be processed still remain, the flow returns to step S1303 to repeat the aforementioned processes. On the other hand, if it is determined in step S1307 that the processes of all signals are complete, the flow advances to step S1308, the aforementioned format module 405 forms a 3D LUT on the basis of the chromaticity coordinate signals (a^* , b^*) obtained in step S1306, and lightness values L^* obtained in step S1304 generates a profile.

As described above, according to the first embodiment, a profile used to print a monochrome image to have a desired tinture and to be free from any tinture change in a print process using the CMS can be easily generated. More specifically, this embodiment comprises the means for setting the gray chromaticity point and chromaticity point change rate, and a profile is generated by determining a gray line on the basis of

setting values. Using this profile, a monochrome print image with a tincture based on user's intention can be obtained.

[Second Embodiment]

5 The second embodiment of the present invention will be described in detail hereinafter with reference to the accompanying drawings.

 An image processing apparatus of the second embodiment converts monochrome image data into color
10 image data which can be printed with a desired tincture without any color deviation upon printing the monochrome image by a designated image output apparatus. Note that the basic arrangement of the image processing apparatus in the second embodiment is the same as that
15 of the first embodiment explained using Fig. 3, and a description thereof will be omitted.

<Functional Arrangement>

 Fig. 14 is a block diagram showing the functional arrangement of the image processing apparatus in the
20 second embodiment. As shown in Fig. 14, the apparatus comprises, as the functional arrangement, a grayscale characteristic conversion module 1401, tincture conversion A module 1402, tincture conversion B module 1403, output profile conversion module 1404, tincture
25 adjustment value setting module 1405, profile acquisition module 1406, grayscale characteristic holding module 1407, tincture conversion table holding

module 1408, chromaticity line table holding module 1409, and output profile holding module 1410.

In this arrangement, monochrome signals GL that form an input monochrome image are converted into R, G, and B color signals, which are required to print the input monochrome image with a desired tincture without any color deviation upon printing the monochrome image by a designated image output apparatus, by the grayscale characteristic conversion module 1401, tincture conversion A module 1402, tincture conversion B module 1403, and output profile conversion module 1404. Note that the aforementioned functional modules -- except for the output profile conversion module 1404, profile acquisition module 1406, and output profile holding module 1410 -- have the same functions as those which have the same names in the first embodiment explained using Fig. 4, the description thereof will be omitted.

The output profile conversion module 1404 converts input L^* , a^* , and b^* color signals into R, G, and B color signals depending on the designated image output apparatus on the basis of an output profile stored in the output profile holding module 1410. Note that the inputted L^* , a^* , and b^* color signals are adjusted to have a desired tincture, and to obscure tincture changes, as has been explained in the first embodiment. For this reason, the image output

apparatus can print the image data formed by the R, G, and B color signals as an image which has a desired tincture and inconspicuous tincture changes. Note that the output profile stored in the output profile holding
5 module 1410 represents the color reproduction characteristics of the image output apparatus, and is acquired by the profile acquisition module 1406.

Fig. 15 shows an example of the output profile stored in the output profile holding module 1410. This
10 output profile is a correspondence table, that is, a so-called 3D LUT of print colors (CIELAB values) in association with discrete R, G, and B color signals. The output profile conversion module 1404 searches this 3D LUT for data near the input L*, a*, and b* color
15 signals, and calculates output R, G, and B color signals using a known interpolation method on the basis of the found data and the input signals.

The profile acquisition module 1406 acquires an output profile of the designated image output apparatus.
20 This output profile is obtained by printing a color patch image of discrete R, G, and B color signals, which form the 3D LUT by the image output apparatus, and measuring the printed color patch image.

Fig. 16 shows an example of the color patch image
25 in the second embodiment. The color patch image includes color patches of color signals, e.g., {R, G, B} = {0, 0, 0}, {0, 0, 16}, ..., {0, 0, 255}, {0, 16, 0},

{0, 16, 16}, ..., {255, 255, 255}. The acquired profile is stored in the output profile holding module 1410, and L*, a*, and b* color signals (colorimetric values of {R, G, B} = {255, 255, 255} and {0, 0, 0}) of white and black print colors are used in the grayscale characteristic holding module 1407 and tinture adjustment value setting module 1405.

<Image Processing Sequence>

Fig. 17 is a flow chart showing the image processing sequence in the second embodiment. This image process is done in the following sequence.

In step S1701, an initial setting process is made. In the initial setting process, a corresponding output profile is stored in the aforementioned output profile holding module 1410 in accordance with the designated image output apparatus and an image recording medium (print paper or the like). Also, an input monochrome image is set. In step S1702, tinture adjustment values are set. In this tinture adjustment value setting process, a corresponding tinture conversion table and chromaticity line table are respectively stored in the aforementioned tinture conversion table holding module 1408 and chromaticity line table holding module 1409 on the basis of the image output apparatus and image recording medium (print paper, etc), and the gray chromaticity point and chromaticity point change

rate set by the aforementioned tinture adjustment value setting module 1405.

In step S1703, the aforementioned grayscale characteristic conversion module 1401 converts a monochrome signal GL which forms the input monochrome image into a lightness value L^* . In step S1704, the aforementioned tinture conversion A module 1402 converts the lightness value L^* into a distance function l . In step S1705, the aforementioned tinture conversion B module 1403 converts the distance function l into a chromaticity coordinate signal (a^* , b^*) on the CIELAB color space. In step S1706, the aforementioned output profile conversion module 1404 calculates R, G, and B color signals depending on the image output apparatus on the basis of that chromaticity coordinate signal (a^* , b^*) and the lightness value L^* obtained in step S1703.

It is checked in step S1707 if the processes of all monochrome signals which form the input monochrome image are complete. If signals to be processed still remain, the flow returns to step S1703 to repeat the aforementioned processes. On the other hand, if the processes of all signals are complete, this image process ends.

As described above, according to the second embodiment, monochrome image data can be converted into color image data which can be printed to have a desired

tincture without any color deviation upon printing that monochrome image data by the image output apparatus.

[Modification of First and Second Embodiments]

In the first and second embodiments mentioned
5 above, the tincture conversion A module (403 in Fig. 4,
1402 in Fig. 14) converts the lightness value L^*
converted by the grayscale characteristic conversion
module (402 in Fig. 4, 1401 in Fig. 14) into a distance
signal l on the gray line. Alternatively, the tincture
10 conversion A module may convert a monochrome signal GL
into a distance signal l without temporarily converting
it into lightness L^* .

Fig. 18 is a block diagram partially showing the
functional arrangement of the image processing
15 apparatus in a modification of the first and second
embodiments. Note that the functional modules other
than a grayscale characteristic conversion module 1801,
tincture conversion A module 1802, and tincture
conversion B module 1803 are not shown in Fig. 18, and
20 are the same as those in the first and second
embodiments.

The tincture conversion A module 1802 in this
modification converts a monochrome signal GL which
forms an input monochrome image into a distance signal
25 1. This conversion process converts the monochrome
signal on the basis of a table as a correspondence
table of distance signals l in association with

discrete monochrome signals GL, in the same manner as in the first and second embodiments.

[Third Embodiment]

The third embodiment of the present invention
5 will be described in detail below with reference to the accompanying drawings.

An image processing apparatus of the third
embodiment converts color signals that form an input
monochrome image into those for a connected image
10 output apparatus, and converts them into color signals,
which allow the image output apparatus to print a
monochrome image with a desired tincture without any
color deviation.

<Arrangement with Peripheral Devices>

15 Fig. 19 is a block diagram showing the arrangement of an image processing apparatus in the third embodiment and its peripheral devices. As shown in Fig. 19, an image processing apparatus 1900 comprises an image input unit 1910, image processing
20 unit 1920, and image output unit 1930. In this arrangement, monochrome image data read from an image recording medium 1901 is input via the image input unit 1910. The image processing unit 1920 converts the input monochrome image data into color signals for an
25 image output apparatus 1902. The image output unit 1930 outputs the converted color signals to the image output apparatus 1902. The image output apparatus 1902

typically comprises a color printer which forms an image on a sheet surface by four, i.e., C, M, Y, and K inks or toners.

<Basic Arrangement>

5 Fig. 20 is a block diagram showing the basic arrangement of the image processing apparatus 1900 in the third embodiment. Referring to Fig. 20, reference numeral 2001 denotes a CPU, which controls the overall apparatus using programs and data stored in a RAM and
10 ROM (to be described below), and also executes image processes (to be described later). Reference numeral 2002 denotes a RAM which comprises an area for temporarily storing programs and data loaded from an external storage device or recording medium drive, and
15 various data whose processes are underway, and also a work area used when the CPU 2001 executes respective processes. Reference numeral 2003 denotes a ROM which stores programs and control data, required to control the overall apparatus.

20 Reference numeral 2004 denotes an operation unit, which comprises a keyboard and a pointing device such as a mouse or the like, and can input color characteristic parameters of the image output apparatus 1902 and an image recording medium (print paper or the
25 like) and a gray tincture adjustment instruction (to be described later) to this apparatus. Reference numeral 2005 denotes a display unit which comprises of, inter

alia, a CRT, and liquid crystal display, and displays various adjustment user interfaces (UIs; to be described later), images and text. Reference numeral 2006 denotes an interface (I/F) which connects the image output apparatus 1902 and is used to output data to the image output apparatus 1902. Reference numeral 2007 denotes an external storage device which saves an operating system (OS), and an image processing program 2008 and parameters 2009 required to implement various image processes. Typically, the image processing program 2008 includes a control program of the image output apparatus 1902. Reference numeral 2010 denotes a recording medium drive, which reads various data including image data from the image recording medium 1901, and outputs them to the external storage device 2007 and RAM 2002. Reference numeral 2011 denotes a bus which interconnects the aforementioned units.

<Functional Arrangement>

Fig. 21 is a block diagram showing the functional arrangement of the image processing unit 1920 shown in Fig. 19. As shown in Fig. 21, the image processing unit 1920 comprises a grayscale characteristic conversion module 2101, tinture conversion A module 2102, tinture conversion B module 2103, output profile conversion module 2104, color separation conversion module 2105, and tinture adjustment value setting module 2106. The image processing unit 1920 converts

monochrome signals GL which form an input monochrome image into input C, M, Y, and K color signals for the image output apparatus 1902.

The grayscale characteristic conversion module 5 2101 converts monochrome signals GL which form an input monochrome image into lightness values L^* of a print image, obtained when the monochrome signals GL are outputted by the image output apparatus 1902, on the basis of grayscale characteristics stored in a 10 grayscale characteristic holding module 2107. Note that the grayscale characteristics stored in the grayscale characteristic holding module 2107 are the same as those shown in Fig. 5 explained in the first embodiment, and the relationship between the monochrome 15 signals GL and lightness values L^* is also the same as that shown in Fig. 6. Hence, a description thereof will be omitted.

The tinture conversion A module 2102 converts each lightness value L^* as an input signal into a 20 distance signal l on the chromaticity space on the basis of a tinture conversion table stored in a tinture conversion table holding module 2108. Note that the tinture conversion table stored in the tinture conversion table holding module 2108 is the 25 same as that shown in Fig. 7 described in the first embodiment. Also, the distance signal l and the chromaticity point path (gray line), (are) for example

the chromaticity point path projected onto the a^*b^* chromaticity plane on the CIELAB color space, and the relationship between lightness values L^* and distance signals l , which form the tincture conversion table, are the same as those shown in Figs. 8 and 9, and a description thereof will be omitted.

The tincture conversion B module 2103 converts each distance signal l as an input signal into a chromaticity coordinate signal (a^* , b^*) on the CIELAB color space on the basis of a chromaticity line table stored in a chromaticity line table holding module 2109. Note that the chromaticity line table stored in the chromaticity line table holding module 2109 is the same as that shown in Fig. 10 explained in the first embodiment, and a description thereof will be omitted.

The output profile conversion module 2104 converts input L^* , a^* , and b^* signals into R, G, and B color signals depending on the image output apparatus 1902 on the basis of an output profile stored in an output profile holding module 2110.

Fig. 22 shows an example of the output profile stored in the output profile holding module 2110. This output profile is a correspondence table, that is, a so-called "3D lookup table (LUT)" of print colors (CIELAB values) in association with discrete R, G, and B color signals, and pertains to the color reproduction characteristics of the image output apparatus 1902 and

image recording medium (print paper or the like). The output profile conversion module 2104 searches this 3D LUT for data near the input L^* , a^* , and b^* color signals, and calculates output R, G, and B color signals using a known interpolation method on the basis of the found data and the input signals.

The color separation conversion module 2105 converts the input R, G, and B color signals into C, M, Y, and K color signals for the image output apparatus 1902 on the basis of a color separation LUT stored in a color separation LUT holding module 2111.

Fig. 23 shows an example of the color separation LUT stored in the color separation LUT holding module 2111. This color separation LUT is a correspondence table of C, M, Y, and K signals in association with discrete R, G, and B color signals, and pertains to the color reproduction characteristics of the image output apparatus 1902 and image recording medium (print paper or the like). The color separation conversion module 2105 converts input R, G, and B color signals into output C, M, Y, and K color signals by a known method using this color separation LUT.

The tinture adjustment value setting module 2106 sets a gray chromaticity point (point G shown in Fig. 8) and chromaticity point change rate (values associates with Φ and θ shown in Fig. 9) using tinture adjustment value setting user interfaces (UIs),

and sets the tinture conversion table to be stored in the tinture conversion table holding module 2108 and the chromaticity line table to be stored in the chromaticity line table holding module 2109. Note that the tinture adjustment value setting user interfaces (UIs) that are the same as those shown in Figs. 11 and 12 described in the first embodiment, and a description thereof will be omitted.

In this way, in the third embodiment as well, since the gray chromaticity point and chromaticity point change rate are set, a monochrome print image with a tinture based on user's intention can be obtained.

<Image Processing Sequence>

Fig. 24 is a flow chart showing the image processing sequence according to the third embodiment. This image process is executed in the following sequence.

In step S2401, an initial setting process is made. In the initial setting process, a corresponding output profile and color separation LUT are stored in the output profile holding module 2110 and color separation LUT holding module 2111 in accordance with the image output apparatus 1902 and an image recording medium (print paper or the like). Also, defaulted or designated grayscale characteristics are stored in the

grayscale characteristic holding module 2107.

Furthermore, an input monochrome image is set.

In step S2402, tinture adjustment values are set.
In this tinture adjustment value setting process, a
5 corresponding tinture conversion table and
chromaticity line table are respectively stored in the
aforementioned tinture conversion table holding module
2108 and chromaticity line table holding module 2109,
on the basis of the image output apparatus 1902 and
10 image recording medium (print paper or the like), and
the gray chromaticity point and chromaticity point
change rate set by the aforementioned tinture
adjustment value setting module 2106.

In step S2403, the aforementioned grayscale
15 characteristic conversion module 2101 converts a
monochrome signal GL which forms the input monochrome
image into a lightness value L^* . In step S2404, the
aforementioned tinture conversion A module 2102
converts the lightness value L^* into a distance
20 function l . In step S2405, the aforementioned tinture
conversion B module 2103 converts the distance function
 l into a chromaticity coordinate signal (a^* , b^*) on the
CIELAB color space.

In step S2406, the output profile conversion
25 module 2104 calculates R, G, and B color signals
depending on the image output apparatus 1902 on the
basis of the chromaticity coordinate signal (a^* , b^*)

obtained in step S2405 and the lightness value L^* obtained in step S2403. In step S2407, the color separation conversion module 2105 converts the R, G, and B color signals obtained in step S2406 into output
5 C, M, Y, and K color signals for the image output apparatus 1902, and outputs the converted signals. It is checked in step S2408 if the processes of all monochrome signals which form the input monochrome image are complete. If signals to be processed still
10 remain, the flow returns to step S2403 to repeat the aforementioned processes.

As described above, according to the third embodiment, the tincture of a monochrome image can be easily adjusted without any tincture changes. More
15 specifically, this embodiment has means for setting a gray chromaticity point and chromaticity point change rate, and sets a gray line on the basis of the setting values. As a result, a monochrome print image with a tincture based on user's intention can be obtained.

20 [Modification of UI]

A modification of the tincture adjustment value setting user interfaces (UIs) in the first to third embodiments will be described below.

Since the tincture adjustment value setting user
25 interfaces (UIs) explained using Figs. 11 and 12 have high degrees of freedom, if they are misused, a desired image cannot be obtained, and an unacceptable result

may be obtained in the worst case. Hence, a modification of these UIs, which can prevent excessive processes against user's will in adjustment of the tincture of a monochrome image, will be explained.

- 5 Note that the basic arrangement, functional arrangement, and image processing sequence are the same as those in the third embodiment, and a description thereof will be omitted.

Fig. 25 shows an example of a UI used to set a gray chromaticity point in the modification. As shown in Fig. 25, the UI includes eight tincture setting buttons 2501 to 2508, gray setting map 2509, OK button 2510, and cancel button 2511. Note that the gray setting map 2509 is a grid image corresponding to the a*b* plane of the CIELAB color space, and grid A at a position corresponding to a* and b* of the current gray chromaticity point is indicated by black. The horizontal direction corresponds to the a* axis, and the vertical direction corresponds to the b* axis.

15 a*b* plane of the CIELAB color space, and grid A at a position corresponding to a* and b* of the current gray chromaticity point is indicated by black. The horizontal direction corresponds to the a* axis, and the vertical direction corresponds to the b* axis.

20 When the black grid moves rightward, a tinge of red is enhanced; when it moves upward, a tinge of yellow is enhanced; when it moves leftward, a tinge of green is enhanced; and when it moves downward, a tinge of blue is enhanced.

- 25 When the tincture setting button 2501 is selected, the black grid position moves in the right direction to enhance a tinge of red. Likewise, the black grid

position moves in the upper right direction upon selection of the tincture setting button 2502; in the upper direction upon selection of the tincture setting button 2503; in the upper left direction upon selection of the tincture setting button 2504; in the left direction upon selection of the tincture setting button 2505; in the lower left direction upon selection of the tincture setting button 2506; in the lower direction upon selection of the tincture setting button 2507; and in the lower right direction upon selection of the tincture setting button 2508. The gray chromaticity point (point G shown in Fig. 8) is then set in a color corresponding to the moved position. By limiting a setting range, an excessive tincture can be prevented from being set.

On the gray setting map 2509, a region outside the setting range is indicated using another color to be distinguished from the setting range. When the black grid position is to be moved outside the setting range by the tincture setting button, an alarm sound is generated to inhibit such movement. When the user selects the OK button 2510, the input chromaticity point is set, and the corresponding chromaticity line table and tincture conversion table are respectively stored in the chromaticity line table holding module 2109 and tincture conversion table holding module 2108. When the user selects the cancel button 2511, the

setting value is canceled, and the chromaticity line table and tincture conversion table are not updated. This setting range is determined in accordance with the subjective evaluation results of output images

5 corresponding to respective setting values. For example, when images are output while changing the setting values in an appropriate step, and undergo subjective evaluation, the range of setting values corresponding to images "accepted" by more than half

10 evaluators is determined as the setting range.

Fig. 26 shows an example of a UI used to set a chromaticity point change rate in the modification. As shown in Fig. 26, the UI includes a slide bar 2601 used to set a chromaticity change rate of a highlight part,

15 a slide bar 2602 used to set a chromaticity change rate of a shadow part, an OK button 2603, and a cancel button 2604. By moving the respective slide bars, the values Φ and θ shown in Fig. 9 are increased/decreased, thus setting the chromaticity change rate. For example,

20 when the slide bar 2601 used to set the chromaticity change rate of a highlight part is moved to the right, Φ increases; when it is moved to the left, Φ decreases. At this time, by limiting a setting range, an excessive tincture can be prevented from being set. In the

25 example shown in Fig. 26, the setting range of the slide bar 2601 used to set the chromaticity change rate of a highlight part is limited to a range from B to C.

Likewise, the setting range of the slide bar 2602 used to set the chromaticity change rate of a shadow part is limited to a range from D to E.

Upon selection of the OK button 2603, Φ and θ are
5 set on the basis of the slide bar positions, and a corresponding tincture conversion table is stored in the tincture conversion table holding module 2108. Upon selection of the cancel button 2604, setting values are canceled, and the tincture conversion table
10 is not updated. This setting range is determined according to the subjective evaluation results of output images corresponding to respective setting values.

According to the arrangement of the modification,
15 since the setting ranges of the gray chromaticity point and chromaticity point change rate are limited upon setting the tincture of a monochrome image, an excessive process against user's will can be prevented.

[Modification of Third Embodiment]

20 <Default Value and Setting Range>

Default values and setting ranges of the aforementioned gray chromaticity point and chromaticity point change rate may be set. The default values and setting ranges may be held in correspondence with
25 respective image recording media (print paper or the like). In this case, the tincture adjustment value

setting module 2106 in Fig. 21 is used to store these default values and setting ranges.

<Save Setting Value>

The setting values of the gray chromaticity point
5 and chromaticity point change rate may be saved. In
such cases, the tinture adjustment value setting
module 2106 in Fig. 21 is used to store the setting
values. Also, the setting values may be registered in
a list, and by selecting a registered setup from the
10 list, setting values corresponding to the selected
setup may be re-used.

Note that <default value and setting range> and
<save setting value> mentioned above may be applied as
modifications of the first and second embodiments in
15 addition to the third embodiment.

<Tinture Conversion A Module>

The aforementioned tinture conversion A module
2102 converts a lightness value L^* into a distance
signal l on the gray line. Alternatively, the tinture
20 conversion A module may convert a monochrome signal GL
into a distance signal l without temporarily converting
it into lightness L^* .

Fig. 27 is a block diagram showing the functional
arrangement of an image processing unit in the
25 modification of the third embodiment. As shown in
Fig. 27, the image processing unit of this modification
comprises of grayscale characteristic conversion module

2701, tinture conversion A module 2702, tinture conversion B module 2703, output profile conversion module 2704, color separation conversion module 2705, and tinture adjustment value setting module 2706.

- 5 This image processing unit converts monochrome signals GL which form an input monochrome image into input C, M, Y, and K color signals for the image output apparatus 1902.

The tinture adjustment setting module 2706 of
10 this modification sets a change rate of a distance signal 1 in association with a monochrome signal GL, that is, a chromaticity point change rate, using the aforementioned UI, and stores a tinture conversion table corresponding to that change rate in a tinture
15 conversion table holding unit 2708. The tinture conversion A module 2702 converts each monochrome signal GL which forms an input monochrome image into a distance signal 1 on the basis of the tinture conversion table stored in the tinture conversion
20 table holding module 2708. Other functional modules have the have the same functions as those which have the same names in the third embodiment.

According to the modification of the third embodiment, tinture adjustment can be done
25 independently of grayscale conversion.

As described above, according to the third embodiment and its modification, the tinture of a

print color can be easily adjusted to be free from any
tincture deviation and to obscure tincture changes.

Note that the present invention may be applied to
either a system constituted by a plurality of devices
5 (e.g., a host computer, interface device, reader,
printer, and the like), or an apparatus consisting of a
single equipment (e.g., a copying machine, facsimile
apparatus, or the like).

The objects of the present invention are also
10 achieved by supplying a recording medium, which records
a program code of a software program that can implement
the functions of the above-mentioned embodiments to the
system or apparatus, and reading out and executing the
program code stored in the recording medium by a
15 computer (or a CPU or MPU) of the system or apparatus.

In this case, the program code itself reads out
from the recording medium implements the functions of
the above-mentioned embodiments, and the recording
medium which stores the program code constitutes the
20 present invention.

A number of various recording mediums for
supplying the program code may be used: for example, a
floppy® disk, hard disk, optical disk, magneto-optical
disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory
25 card, and ROM.

The functions of the above-mentioned embodiments
may be implemented, not only by executing the readout

program code by the computer, but also by some or all of actual processing operations executed by an OS (operating system) running on the computer on the basis of an instruction of the program code.

5 Furthermore, the functions of the above-mentioned embodiments may be implemented by some or all of the actual processing operations executed by a CPU, or the like, arranged in a function extension board or a function extension unit, which is inserted in or
10 connected to the computer after the program code read out from the recording medium is written in a memory of the extension board or unit.

As described above, according to the above embodiments, a profile used to print a monochrome image
15 with a tincture of user's choice without any color deviation may be generated.

As many apparently widely different embodiments of the present invention may be made without departing from the spirit and scope thereof, it is to be
20 understood that the invention is not limited to the specific embodiments thereof except as defined in the claims.

CLAIMS

1. A color conversion method for converting an input monochrome signal into a color signal on a predetermined color space, comprising:

5 a setting step of setting a tincture adjustment value used to adjust the input monochrome signal to a desired tincture of a user;

an acquisition step of acquiring color reproduction characteristics which depend on an image
10 output apparatus and a recording medium;

a first conversion step of converting the input monochrome signal into a first color signal using the color reproduction characteristics acquired in the acquisition step;

15 a second conversion step of converting the first color signal converted in the first conversion step into a second color signal using the tincture adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step;

20 a third conversion step of converting the second color signal converted in the second conversion step into a third color signal; and

an output step of forming and outputting a color
25 signal on the color space on the basis of the third color signal converted in the third conversion step and

the first color signal converted in the first conversion step.

2. The method according to claim 1, wherein the second conversion step includes a step of converting
5 the first color signal into the second color signal using the tincture adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step.

3. The method according to claim 2, wherein the
10 color signal on the color space is expressed by a lightness value, and a chromaticity point which pertains to hue and saturation attributes.

4. The method according to claim 3, wherein the setting step includes a step of setting, as the
15 tincture adjustment value, at least either a chromaticity point on the color space corresponding to a predetermined monochrome signal or a change rate of a predetermined chromaticity point on the color space.

5. The method according to claim 4, wherein the
20 acquisition step includes a step of acquiring, as the color reproduction characteristics, color signals on the color space, which correspond to monochrome signals indicating white and black.

6. The method according to claim 5, wherein in the
25 setting step, the predetermined monochrome signal is a monochrome signal corresponding to middle lightness, and the change rate of the predetermined chromaticity

point is a change rate of chromaticity points associated with monochrome signals of highlight and shadow parts.

7. The method according to claim 5, wherein in the
5 setting step, the change rate of the predetermined chromaticity point is a change rate of distance on a line segment L in association with a monochrome signal, when the line segment L represents a line segment which connects the chromaticity point, which corresponds to
10 the monochrome signal indicating white acquired in the acquisition step, the chromaticity point set in the setting step, and the chromaticity point, which corresponds to the monochrome signal indicating black acquired in the acquisition step.

15 8. The method according to claim 7, wherein the first conversion step includes a step of converting the input monochrome signal into a color signal indicating a lightness value on the color space,

the second conversion step includes a step of
20 converting the first color signal converted in the first conversion step into a color signal indicating a distance on the line segment L,

the third conversion step includes a step of
converting the second color signal converted in the
25 second conversion step into a color signal indicating a chromaticity point on the color space, and

the output step includes a step of forming and outputting the color signal on the color space, on the basis of the first signal which is converted in the first conversion step and indicates the lightness value
5 on the color space, and the third color signal which is converted in the third conversion step and indicates the chromaticity point on the color space.

9. The method according to claim 8, wherein the color space is a CIE/L*a*b* color space on which a
10 lightness value is represented by L* and a chromaticity point is represented by a* and b*.

10. The method according to claim 8, wherein the setting step includes a step of setting the chromaticity point and the chromaticity point change
15 rate within predetermined ranges.

11. A profile generation method for generating a profile which stores a relationship between monochrome signals and color signals on a predetermined color space, comprising:

20 a setting step of setting a tincture adjustment value used to adjust monochrome signals to a desired tincture of a user;

an acquisition step of acquiring color reproduction characteristics which depend on an image
25 output apparatus and a recording medium;

a generation step of generating discrete monochrome signals;

a first conversion step of converting the monochrome signals generated in the generation step into first color signals using the color reproduction characteristics acquired in the acquisition step;

5 a second conversion step of converting the first color signals converted in the first conversion step into second color signals using the tinture adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step;

10 a third conversion step of converting the second color signals converted in the second conversion step into third color signals; and

a profile generation step of generating a profile
15 on the basis of the third color signals converted in the third conversion step and the first color signals converted in the first conversion step.

12. The method according to claim 11, wherein the second conversion step includes a step of converting
20 the first color signals converted in the first conversion step into the second color signals using the tinture adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step.

25 13. The method according to claim 12, wherein each color signal on the color space is expressed by a

lightness value, and a chromaticity point which pertains to hue and saturation attributes.

14. The method according to claim 13, wherein the setting step includes a step of setting, as the
5 tincture adjustment value, at least either a chromaticity point on the color space corresponding to a predetermined monochrome signal or a change rate of a predetermined chromaticity point on the color space.

15. The method according to claim 14, wherein the
10 acquisition step includes a step of acquiring, as the color reproduction characteristics, color signals on the color space, which correspond to monochrome signals indicating white and black.

16. The method according to claim 15, wherein in the
15 setting step, the predetermined monochrome signal is a monochrome signal corresponding to middle lightness, and the change rate of the predetermined chromaticity point is a change rate of chromaticity points associated with monochrome signals of highlight and
20 shadow parts.

17. The method according to claim 15, wherein in the setting step, the change rate of the predetermined chromaticity point is a change rate of distance on a line segment L in association with a monochrome signal,
25 when the line segment L represents a line segment which connect the chromaticity point, which corresponds to the monochrome signal indicating white acquired in the

acquisition step, the chromaticity point set in the setting step, and the chromaticity point, which corresponds to the monochrome signal indicating black acquired in the acquisition step.

5 18. The method according to claim 17, wherein the first conversion step includes a step of converting the monochrome signals generated in the generation step into color signals indicating lightness values on the color space,

10 the second conversion step includes a step of converting the first color signals converted in the first conversion step into color signals indicating distances on the line segment L,

the third conversion step includes a step of
15 converting the second color signals converted in the second conversion step into color signals indicating chromaticity points on the color space, and

the profile generation step includes a step of generating the profile using the first signals which
20 are converted in the first conversion step and indicate the lightness values on the color space, and the third color signals which are converted in the third conversion step and indicate the chromaticity points on the color space.

25 19. The method according to claim 18, wherein the color space is a CIE/L*a*b* color space on which a

lightness value is represented by L^* and a chromaticity point is represented by a^* and b^* .

20. The method according to claim 18, wherein the setting step includes a step of setting the
5 chromaticity point and the chromaticity point change rate within predetermined ranges.

21. An image conversion method for converting input monochrome image data into color image data for an image output apparatus designated by a user,
10 comprising:

a setting step of setting a tincture adjustment value used to adjust the input monochrome image data to a desired tincture of a user;

an acquisition step of acquiring color
15 reproduction characteristics which depend on the image output apparatus and a recording medium;

a first conversion step of converting monochrome signals which form the input monochrome image data into first color signals using the color reproduction
20 characteristics acquired in the acquisition step;

a second conversion step of converting the first color signals converted in the first conversion step into second color signals using the tincture adjustment value set in the setting step and the color
25 reproduction characteristics acquired in the acquisition step;

a third conversion step of converting the second color signals converted in the second conversion step into third color signals; and

a conversion step of converting the third color
5 signals converted in the third conversion step and the first color signals converted in the first conversion step into color image data for the image output apparatus, and outputting the color image data.

22. The method according to claim 21, wherein the
10 second conversion step includes a step of converting the first color signals converted in the first conversion step into the second color signals using the tinture adjustment value set in the setting step and the color reproduction characteristics acquired in the
15 acquisition step.

23. The method according to claim 22, wherein each color signal on the color space is expressed by a lightness value, and a chromaticity point which pertains to hue and saturation attributes.

20 24. The method according to claim 23, wherein the setting step includes a step of setting, as the tinture adjustment value, at least either a chromaticity point on the color space corresponding to a predetermined monochrome signal or a change rate of a
25 predetermined chromaticity point on the color space.

25. The method according to claim 24, wherein the acquisition step includes a step of acquiring, as the

color reproduction characteristics, color signals on the color space, which correspond to monochrome signals indicating white and black.

26. The method according to claim 25, wherein in the
5 setting step, the predetermined monochrome signal is a monochrome signal corresponding to middle lightness, and the change rate of the predetermined chromaticity point is a change rate of chromaticity points associated with monochrome signals of highlight and
10 shadow parts.

27. The method according to claim 25, wherein in the setting step, the change rate of the predetermined chromaticity point is a change rate of distance on a line segment L in association with a monochrome signal,
15 when the line segment L represents a line segment which connects the chromaticity point, which corresponds to the monochrome signal indicating white acquired in the acquisition step, the chromaticity point set in the setting step, and the chromaticity point, which
20 corresponds to the monochrome signal indicating black acquired in the acquisition step.

28. The method according to claim 27, wherein the first conversion step includes a step of converting the monochrome signals which form the input monochrome
25 image data into color signals indicating lightness values on the color space,

the second conversion step includes a step of converting the first color signals converted in the first conversion step into color signals indicating distances on the line segment L,

5 the third conversion step includes a step of converting the second color signals converted in the second conversion step into color signals indicating chromaticity points on the color space, and

the conversion step includes a step of converting
10 the first signals, which are converted in the first conversion step and indicate the lightness values on the color space, and the third color signals, which are converted in the third conversion step and indicate the chromaticity points on the color space, into color
15 image data for the image output apparatus, and outputting the color image data.

29. The method according to claim 28, wherein the color space is a CIE/L*a*b* color space on which a lightness value is represented by L* and a chromaticity
20 point is represented by a* and b*.

30. The method according to claim 28, wherein the setting step includes a step of setting the chromaticity point and the chromaticity point change rate within predetermined ranges.

25 31. An image processing apparatus for converting an input monochrome signal into a color signal on a

predetermined color space, and outputting the color signal, comprising:

setting means for setting a tincture adjustment value used to adjust the input monochrome signal to a
5 desired tincture of a user;

acquisition means for acquiring color reproduction characteristics which depend on an image output apparatus and a recording medium;

first conversion means for converting the input
10 monochrome signal into a first color signal using the color reproduction characteristics acquired by said acquisition means;

second conversion means for converting the first color signal converted by said first conversion means
15 into a second color signal using the tincture adjustment value set by said setting means and the color reproduction characteristics acquired by said acquisition means;

third conversion means for converting the second
20 color signal converted by said second conversion means into a third color signal; and

output means for forming and outputting a color signal on the color space on the basis of the third color signal converted by said third conversion means
25 and the first color signal converted by said first conversion means.

32. An image processing apparatus for generating a profile which stores a relationship between monochrome signals and color signals on a predetermined color space, comprising:

5 setting means for setting a tincture adjustment value used to adjust monochrome signals to a desired tincture of a user;

 acquisition means for acquiring color reproduction characteristics which depend on an image
10 output apparatus and a recording medium;

 generation means for generating discrete monochrome signals;

 first conversion means for converting the monochrome signals generated by said generation means
15 into first color signals using the color reproduction characteristics acquired by said acquisition means;

 second conversion means for converting the first color signals converted by said first conversion means into second color signals using the tincture adjustment
20 value set by said setting means and the color reproduction characteristics acquired by said acquisition means;

 third conversion means for converting the second color signals converted by said second conversion means
25 into third color signals; and

 profile generation means for generating a profile on the basis of the third color signals converted by

said third conversion means and the first color signals converted by said first conversion means.

33. An image processing apparatus for converting input monochrome image data into color image data for an image output apparatus designated by a user, and outputting the color image data, comprising:

setting means for setting a tincture adjustment value used to adjust the input monochrome image data to a desired tincture of a user;

10 acquisition means for acquiring color reproduction characteristics which depend on the image output apparatus and a recording medium;

first conversion means for converting monochrome signals which form the input monochrome image data into first color signals using the color reproduction characteristics acquired by said acquisition means;

15 second conversion means for converting the first color signals converted by said first conversion means into second color signals using the tincture adjustment value set by said setting means and the color reproduction characteristics acquired by said acquisition means;

20 third conversion means for converting the second color signals converted by said second conversion means into third color signals; and

conversion means for converting the third color signals converted by said third conversion means and

the first color signals converted by said first conversion means into color image data for the image output apparatus, and outputting the color image data.

34. A program for making a computer execute a color
5 conversion method of claim 1.

35. A program for making a computer execute a color conversion method of claim 11.

36. A program for making a computer execute a color conversion method of claim 21.

10 37. A color conversion method for converting an input monochrome signal into a color signal on a predetermined color space, comprising:

a setting step of setting a tinture adjustment value used to adjust the input monochrome signal to a
15 desired tinture of a user;

an acquisition step of acquiring color reproduction characteristics which depend on an image output apparatus and a recording medium;

a first conversion step of converting the input
20 monochrome signal into a first color signal using the color reproduction characteristics acquired in the acquisition step;

a second conversion step of converting the monochrome signal into a second color signal using the
25 tinture adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step;

a third conversion step of converting the second color signal converted in the second conversion step into a third color signal; and

an output step of forming and outputting a color
5 signal on the color space on the basis of the third color signal converted in the third conversion step and the first color signal converted in the first conversion step.

38. A profile generation method for generating a
10 profile which stores a relationship between monochrome signals and color signals on a predetermined color space, comprising:

a setting step of setting a tincture adjustment value used to adjust monochrome signals to a desired
15 tincture of a user;

an acquisition step of acquiring color reproduction characteristics which depend on an image output apparatus and a recording medium; ,

a generation step of generating discrete
20 monochrome signals;

a first conversion step of converting the monochrome signals generated in the generation step into first color signals using the color reproduction characteristics acquired in the acquisition step;

25 a second conversion step of converting the monochrome signals generated in the generation step into second color signals using the tincture adjustment

value set in the setting step and the color reproduction characteristics acquired in the acquisition step;

5 a third conversion step of converting the second color signals converted in the second conversion step into third color signals; and

a profile generation step of generating a profile on the basis of the third color signals converted in the third conversion step and the first color signals
10 converted in the first conversion step.

39. An image conversion method for converting input monochrome image data into color image data for an image output apparatus designated by a user, comprising:

15 a setting step of setting a tincture adjustment value used to adjust the input monochrome image data to a desired tincture of a user;

an acquisition step of acquiring color reproduction characteristics which depend on the image
20 output apparatus and a recording medium;

a first conversion step of converting monochrome signals which form the input monochrome image data into first color signals using the color reproduction characteristics acquired in the acquisition step;

25 a second conversion step of converting the monochrome signals which form the input monochrome image data into second color signals using the tincture

adjustment value set in the setting step and the color reproduction characteristics acquired in the acquisition step;

a third conversion step of converting the second
5 color signals converted in the second conversion step into third color signals; and


a conversion step of converting the third color signals converted in the third conversion step and the first color signals converted in the first conversion
10 step into color image data for the image output apparatus, and outputting the color image data.

40. An profile generating method for generating a profile to convert input image data into uniform tone image data for an image output apparatus, comprising:
15 a setting step of setting a tincture adjustment value used to adjust the input image data to a desired tincture uniform tone image of a user;

an acquisition step of acquiring color reproduction characteristics which depend on the image
20 output apparatus and a recording medium;


a profile generating step for generating a profile to form the uniform tone image by using the tincture adjustment value and the acquired color reproduction characteristics.

FIG. 1

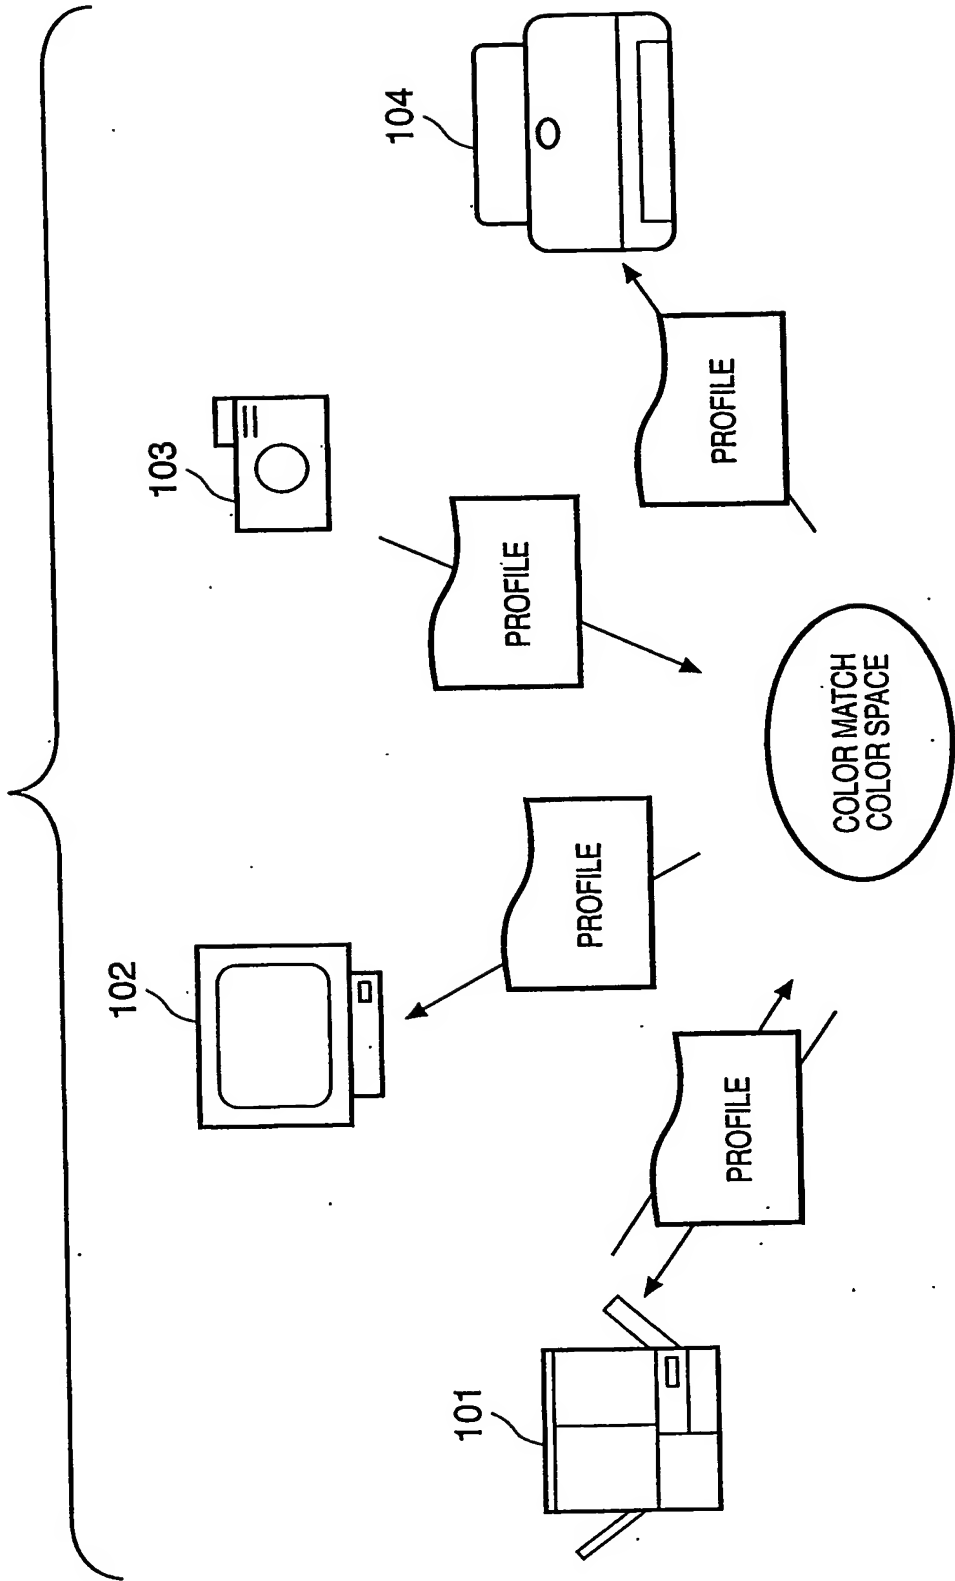


2/27

FIG. 2

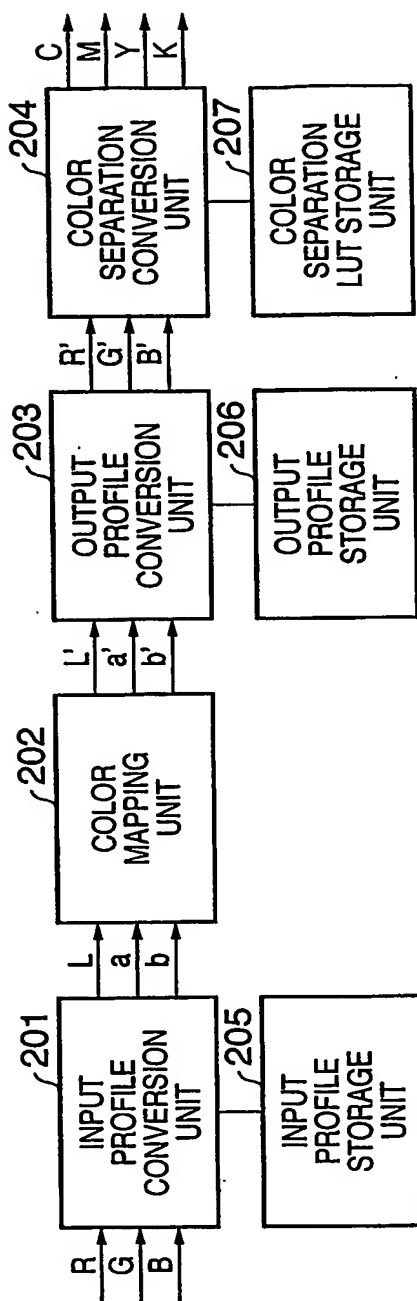


3/27

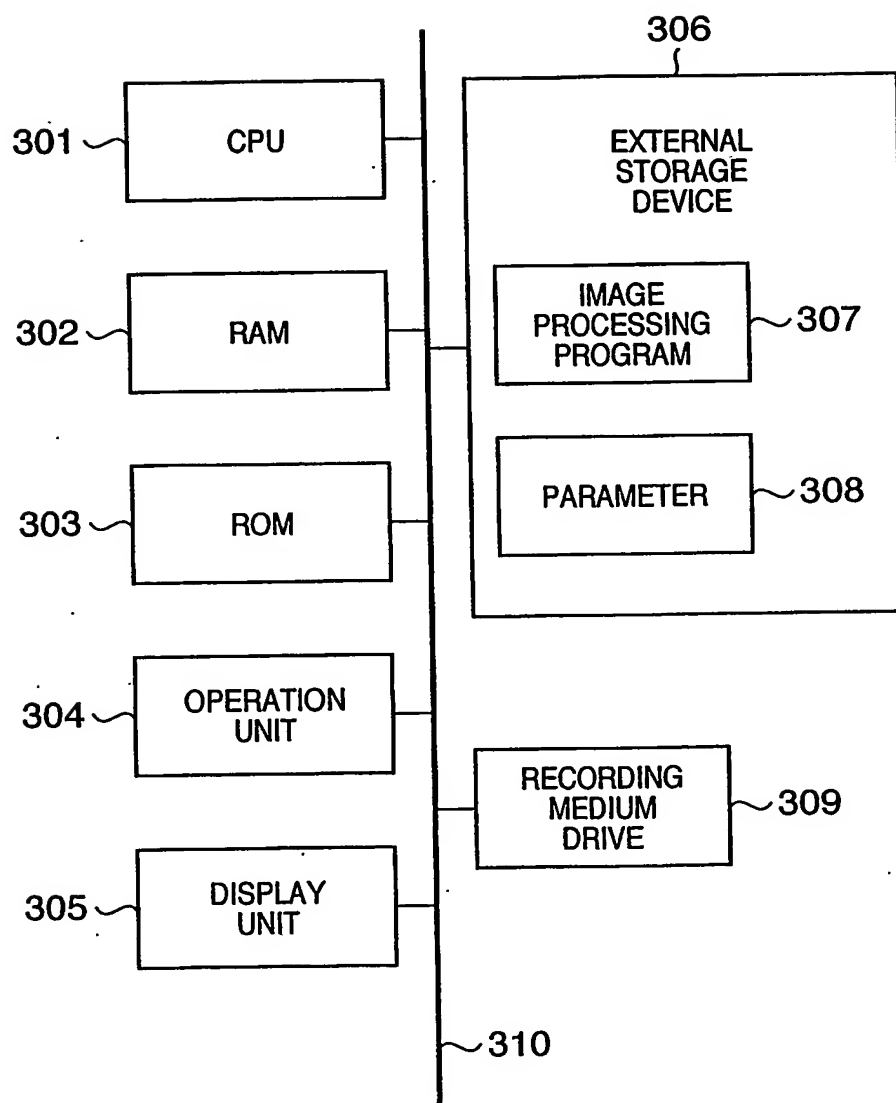FIG. 3

4/27

FIG. 4

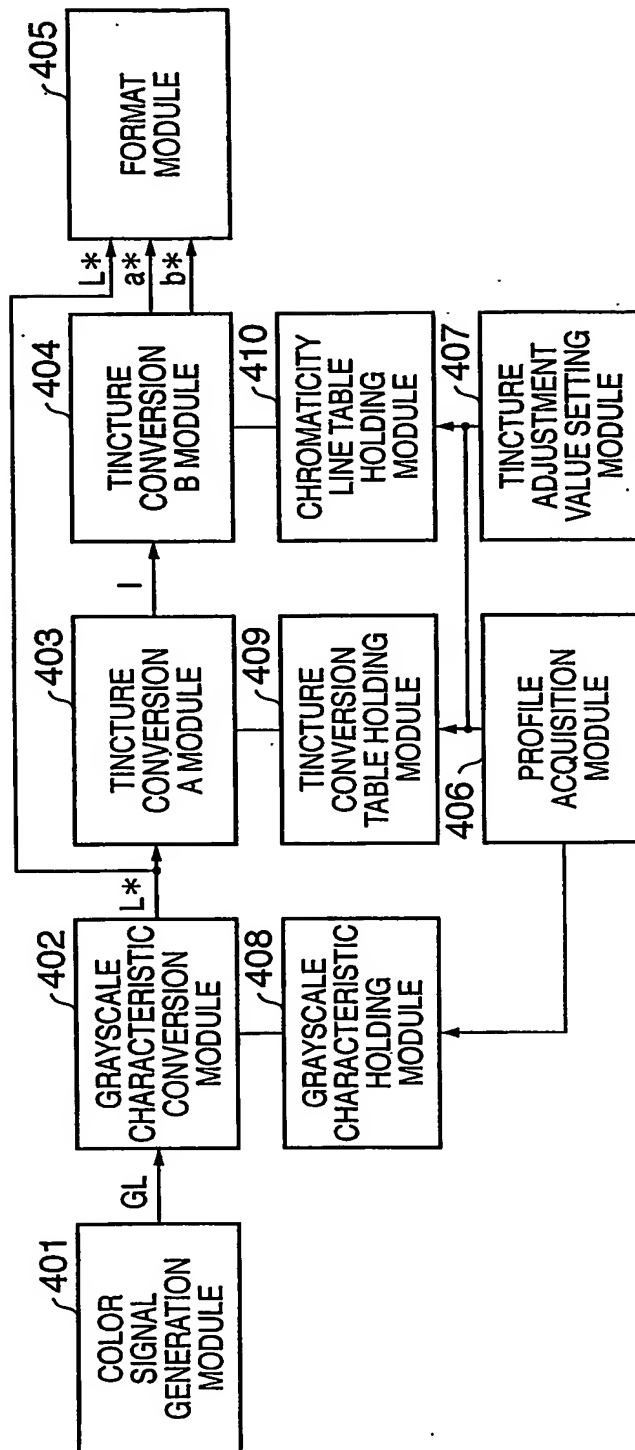


5/27

FIG. 5

[illegible]

6/27

FIG. 6

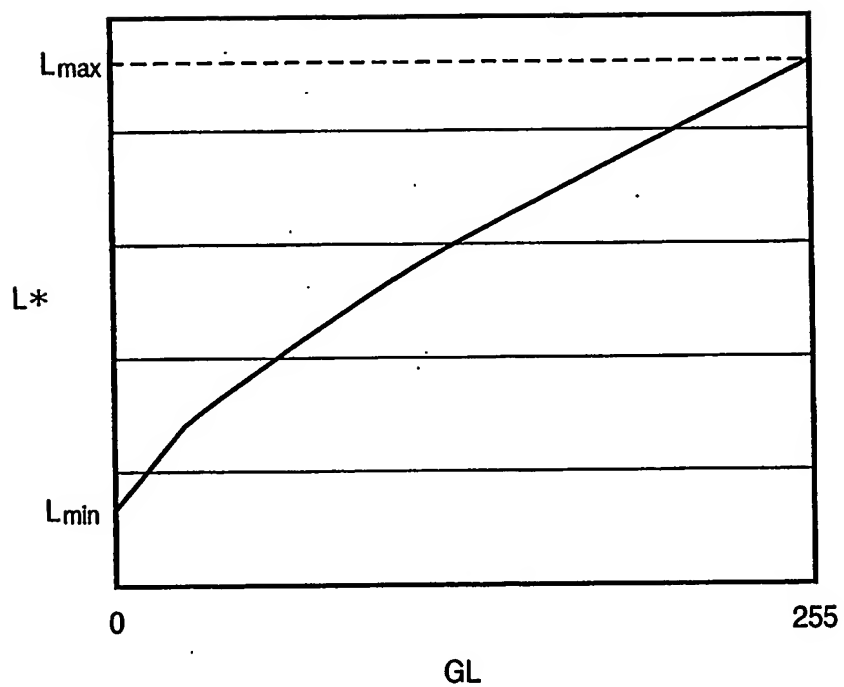


7127

FIG. 7

[illegible]


8/27

FIG. 8

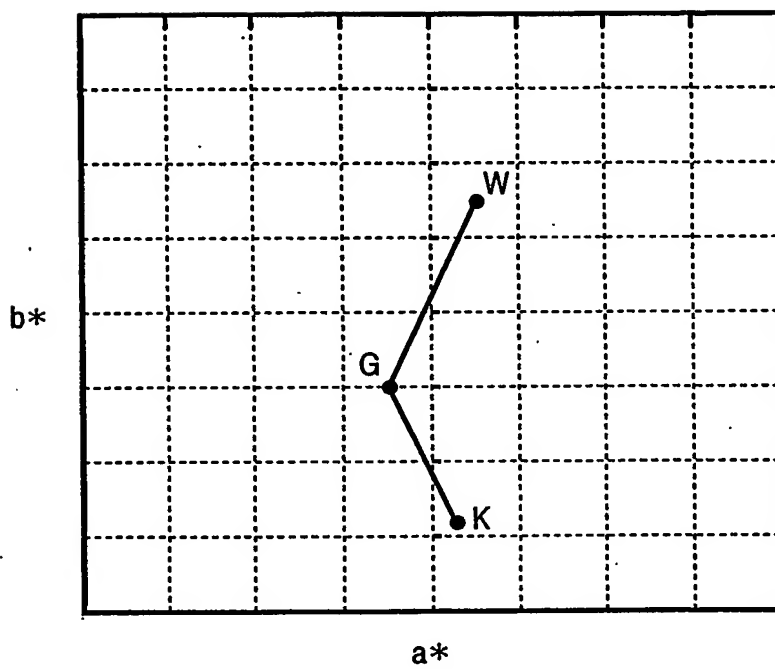

9/27

FIG. 9

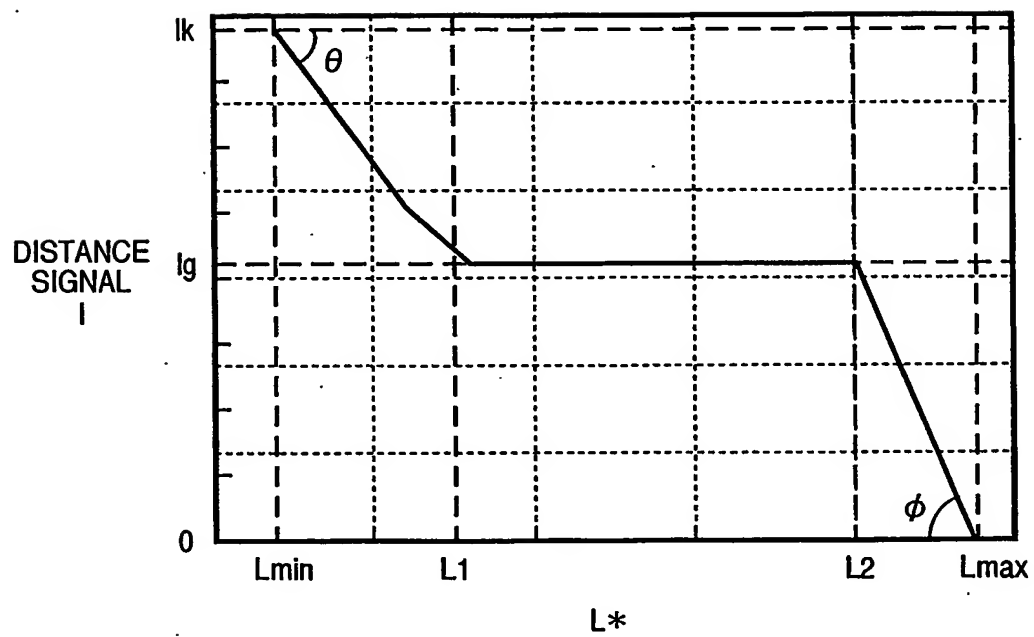

10/27

FIG. 10

l	a*	b*
0	x.x	x.x
0.2	x.x	x.x
0.4	x.x	x.x
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
x.x	x.x	x.x

11/27

FIG. 11

GRAY CHROMATICITY POINT

a* :

b* :

The figure shows a rectangular window with a black border. Inside, the title 'GRAY CHROMATICITY POINT' is at the top left. Below it, the label 'a* :' is followed by a rectangular input box. To the right of this box is the reference numeral '1101'. Below the 'a*' box, the label 'b* :' is followed by another rectangular input box. To the right of this box is the reference numeral '1102'. At the bottom left, there is an oval button containing the text 'OK'. To its right is another oval button containing the text 'CANCEL'. Above the 'OK' button is the reference numeral '1103', and above the 'CANCEL' button is the reference numeral '1104'. All text and lines are black on a white background.

12/27

FIG. 12


CHROMATICITY POINT CHANGE RATE
(CHROMATICITY DIFFERENCE/L*)

HIGHLIGHT PART : 1201

SHADOW PART : 1202


1203 1204

13/27

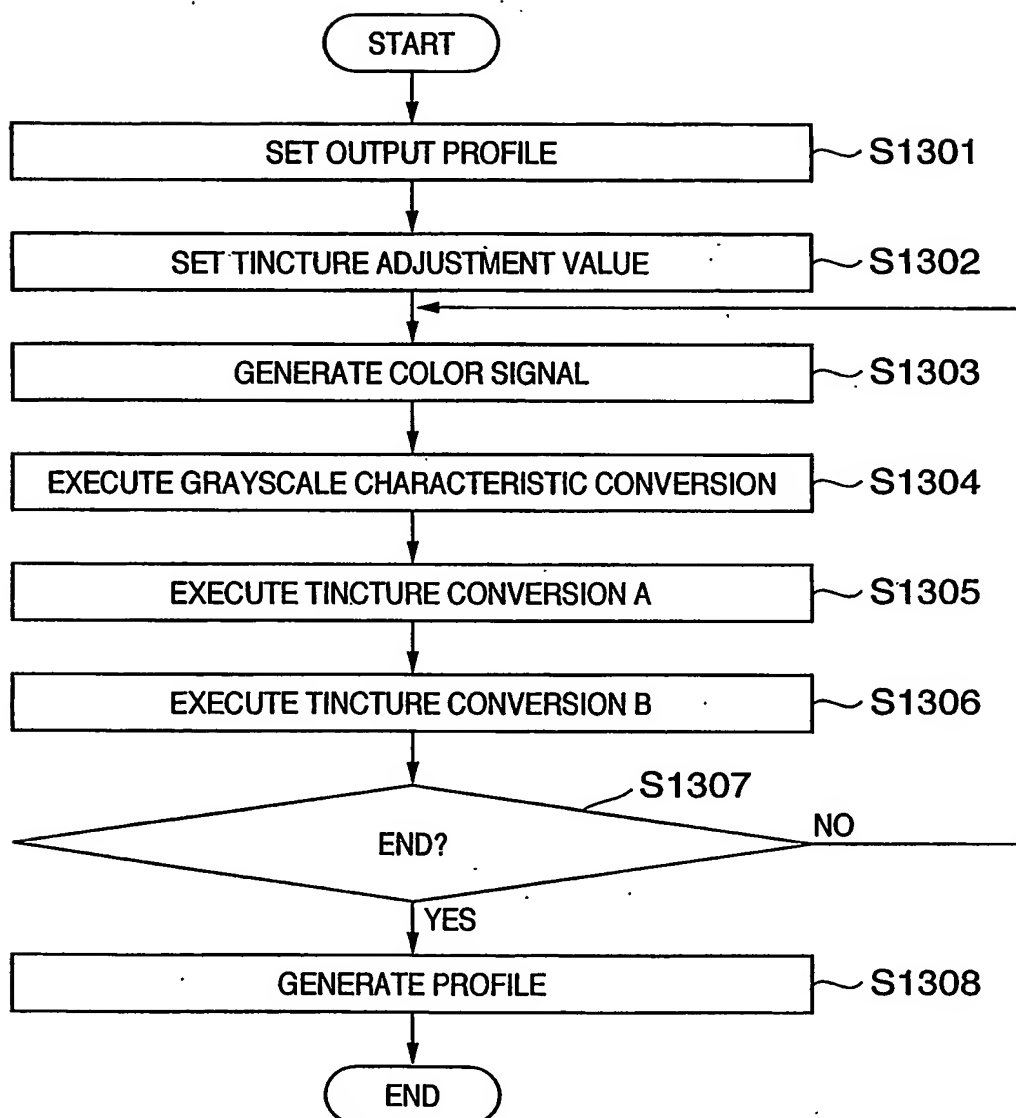FIG. 13

14/27

FIG. 14

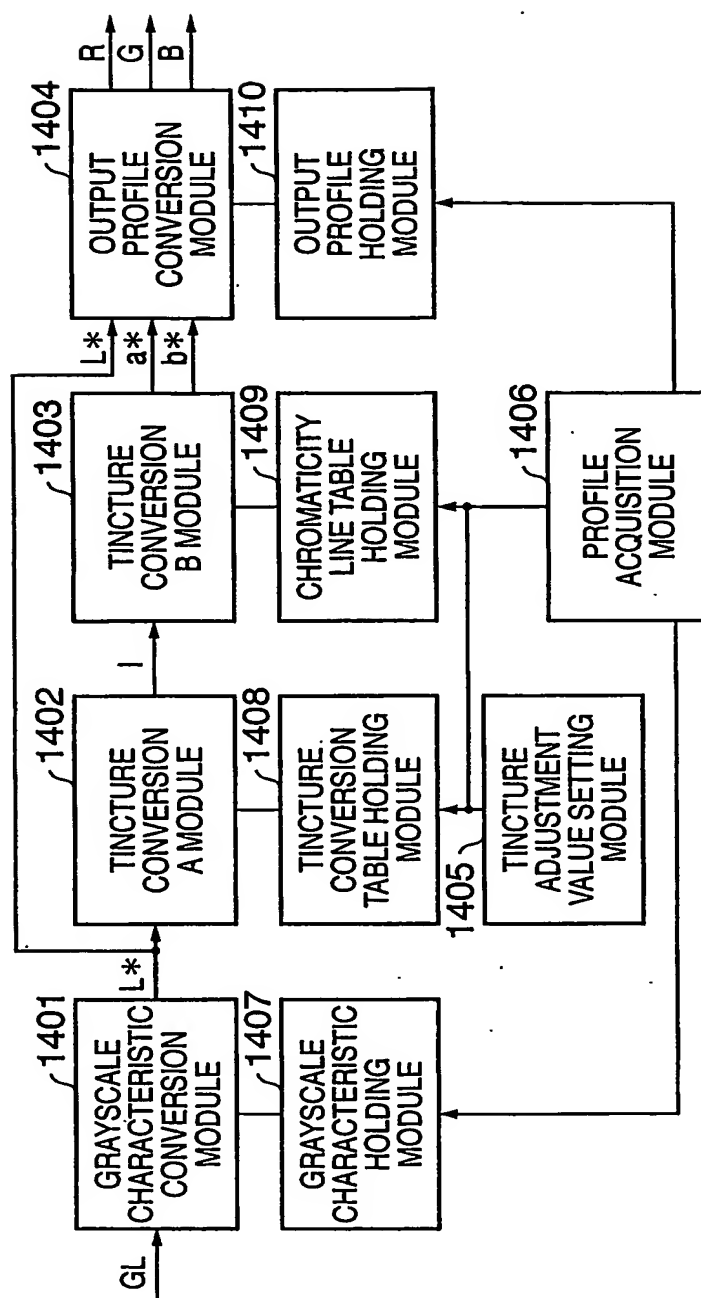


15/27

FIG. 15

R	G	B	L*	a*	b*
0	0	0	XX	XX	XX
0	0	16	XX	XX	XX
.	.	.	XX	XX	XX
0	0	255	.	.	.
0	16	0	.	.	.
.
.
255	255	255	XX	XX	XX

FIG. 16

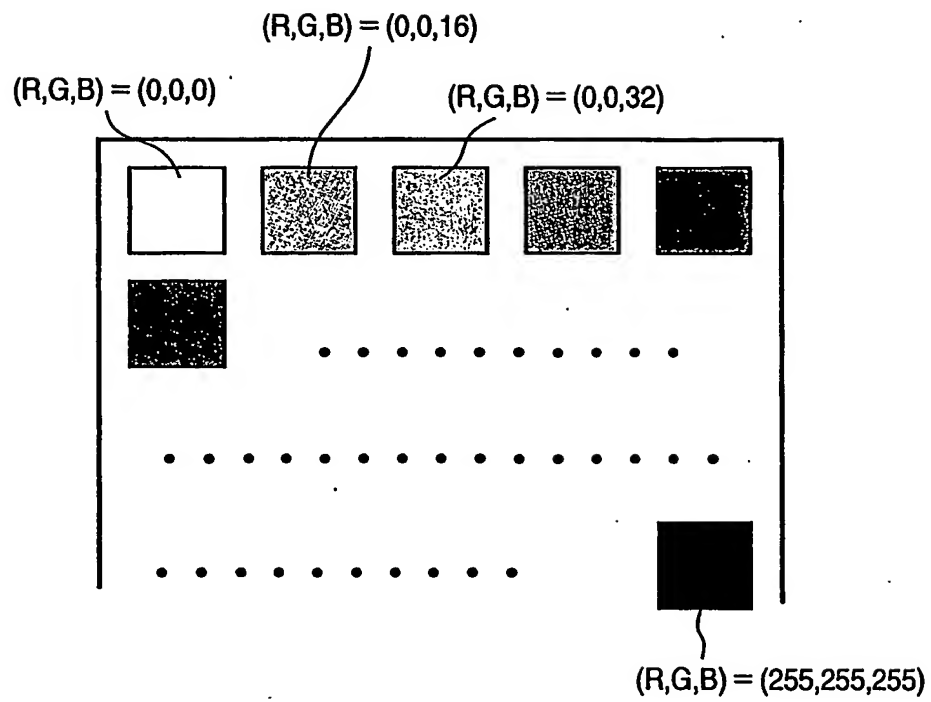

17/27

FIG. 17



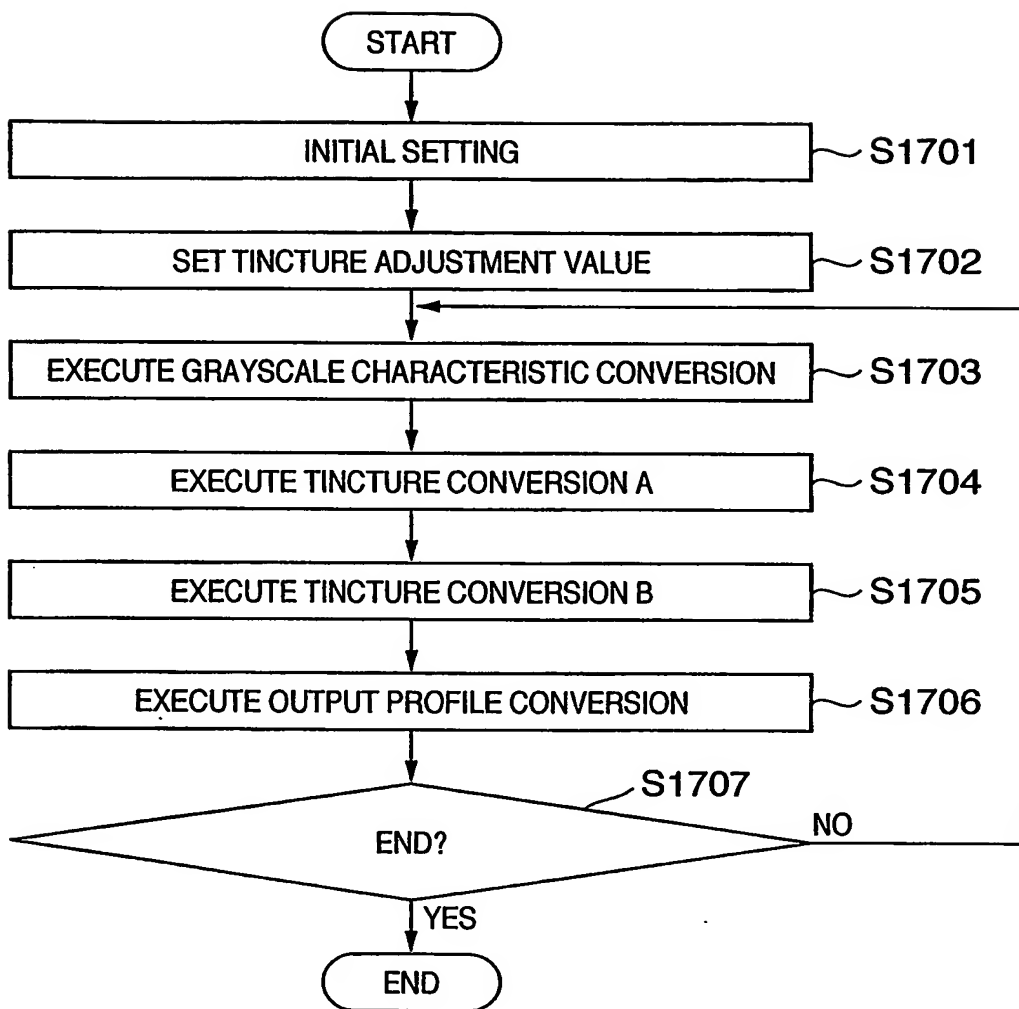


FIG. 18

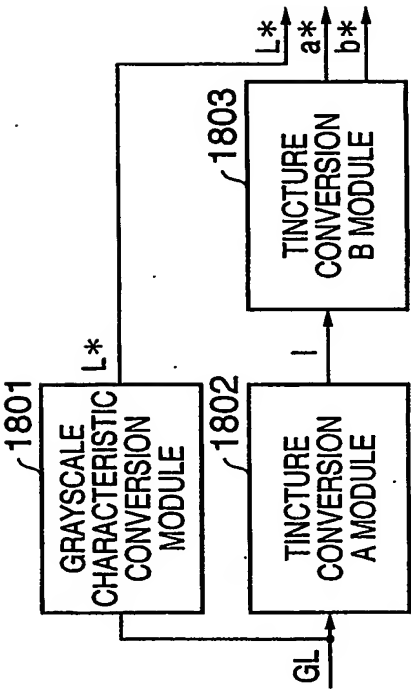


19/27

FIG. 19

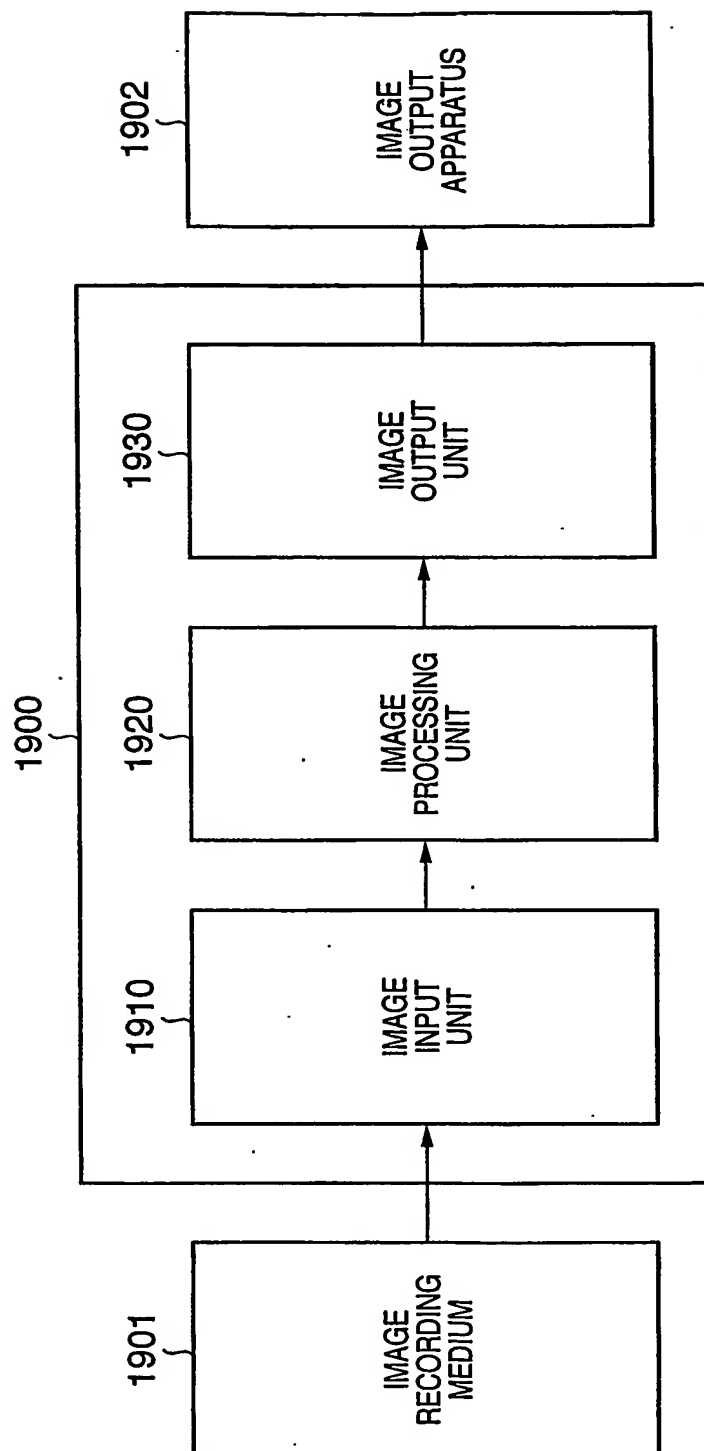

20/27

FIG. 20

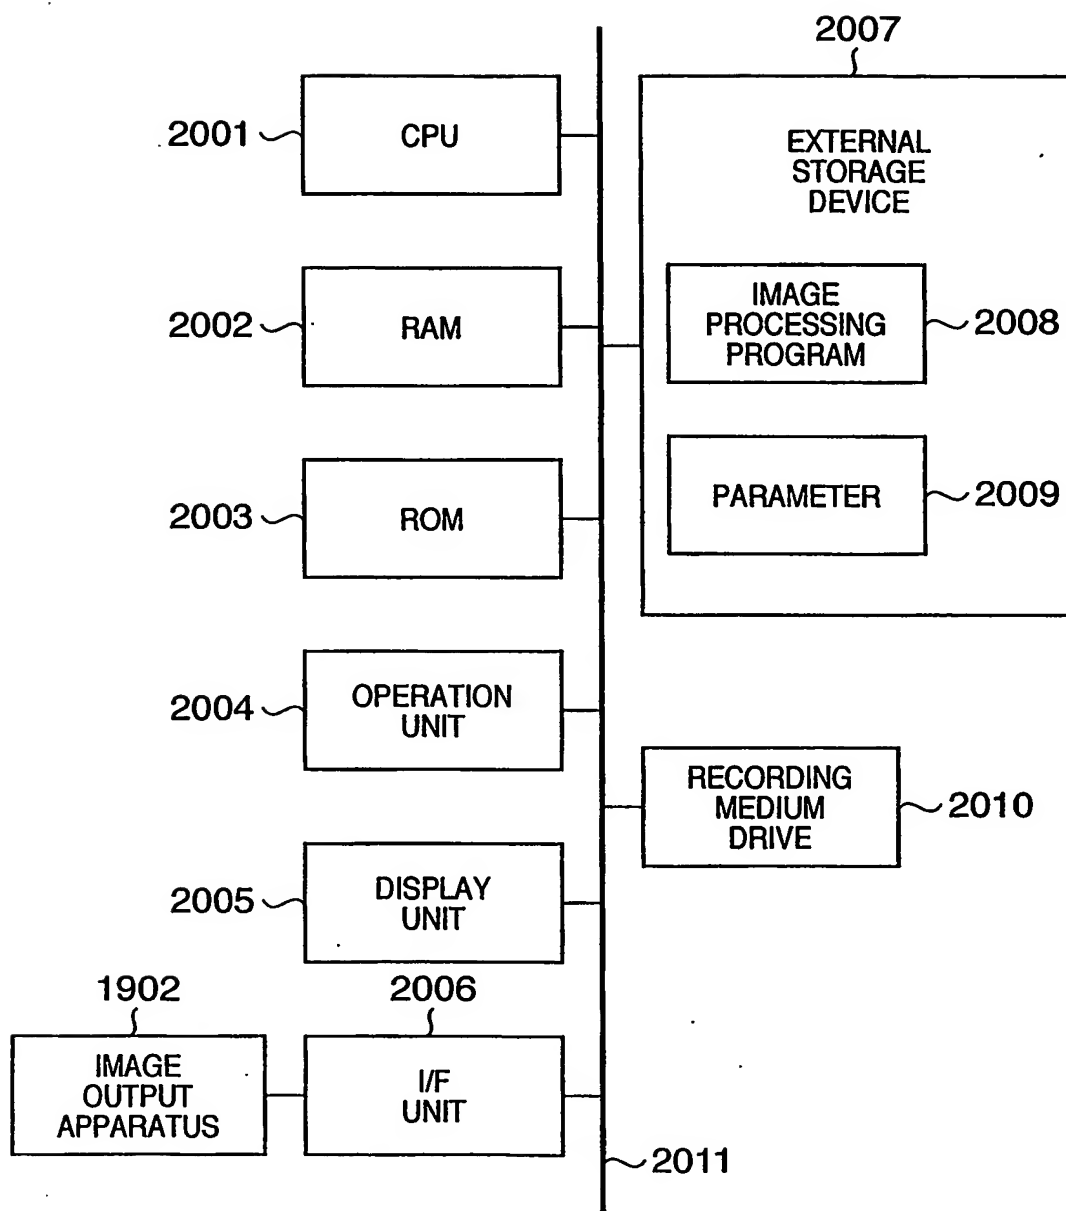

21/27

FIG. 21

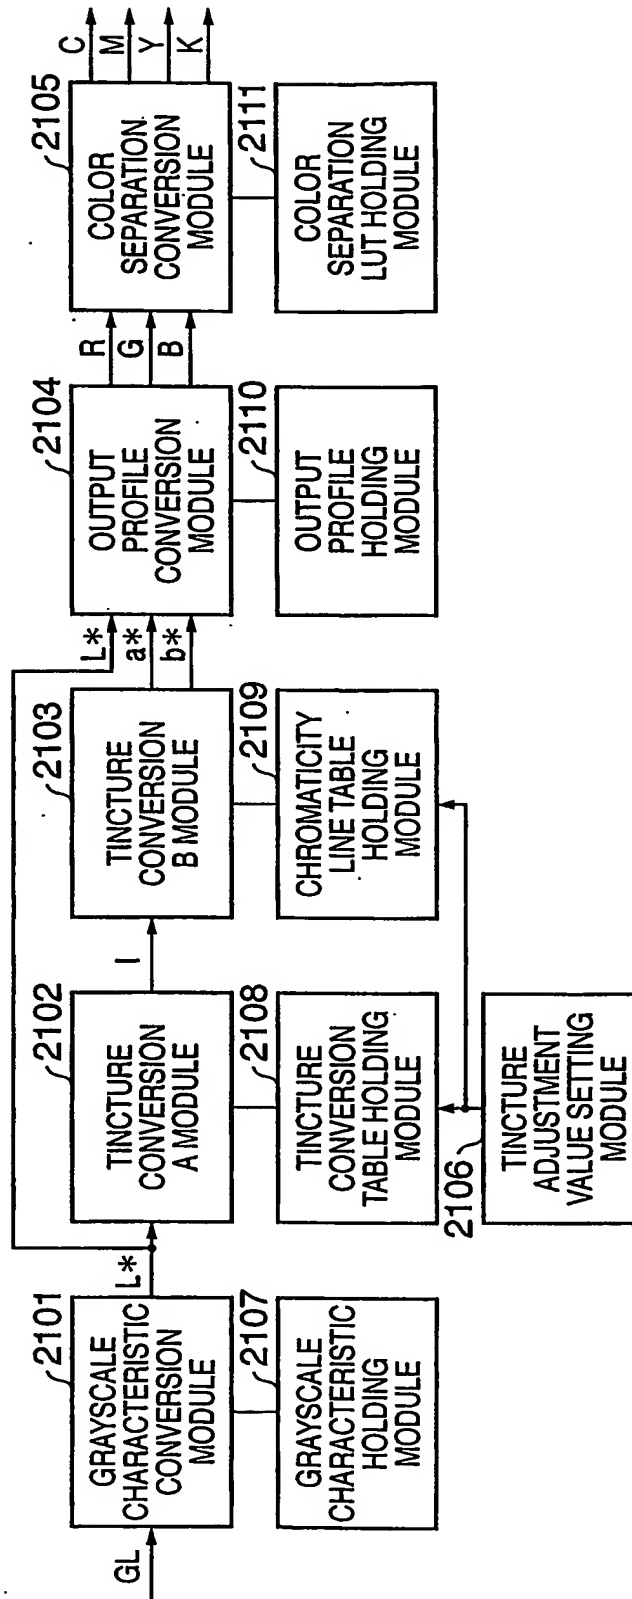


FIG. 22


R	G	B	L*	a*	b*
0	0	0	XX	XX	XX
0	0	16	XX	XX	XX
.	.	.	XX	XX	XX
0	0	255	.	.	.
0	16	0	.	.	.
.
.
255	255	255	XX	XX	XX

23/27

FIG. 23


R	G	B	C	M	Y	K
0	0	0	XX	XX	XX	XX
0	0	16	XX	XX	XX	XX
.	.	.	XX	XX	XX	XX
0	0	255
0	16	0
.
.
255	255	255	XX	XX	XX	XX

24/27

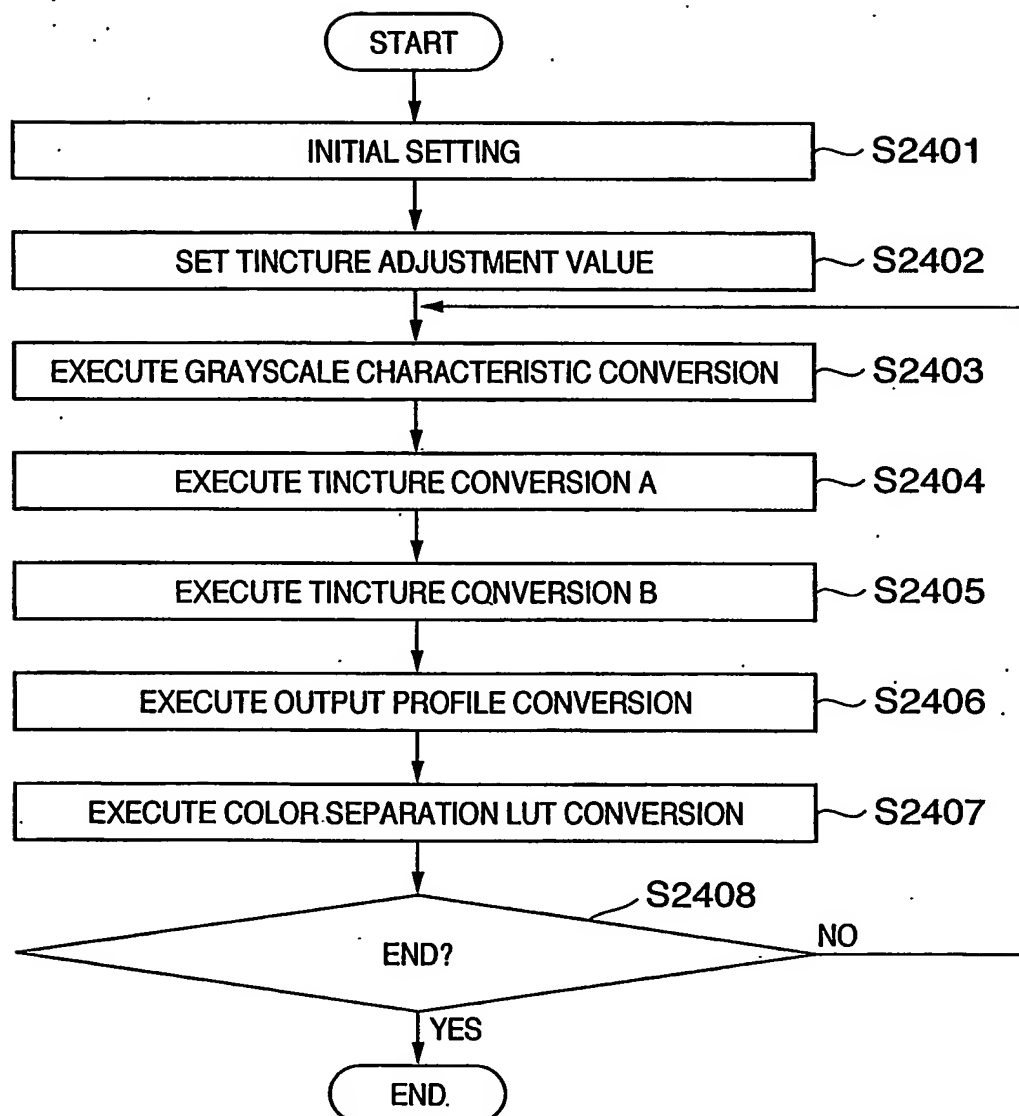FIG. 24


25/27

FIG. 25

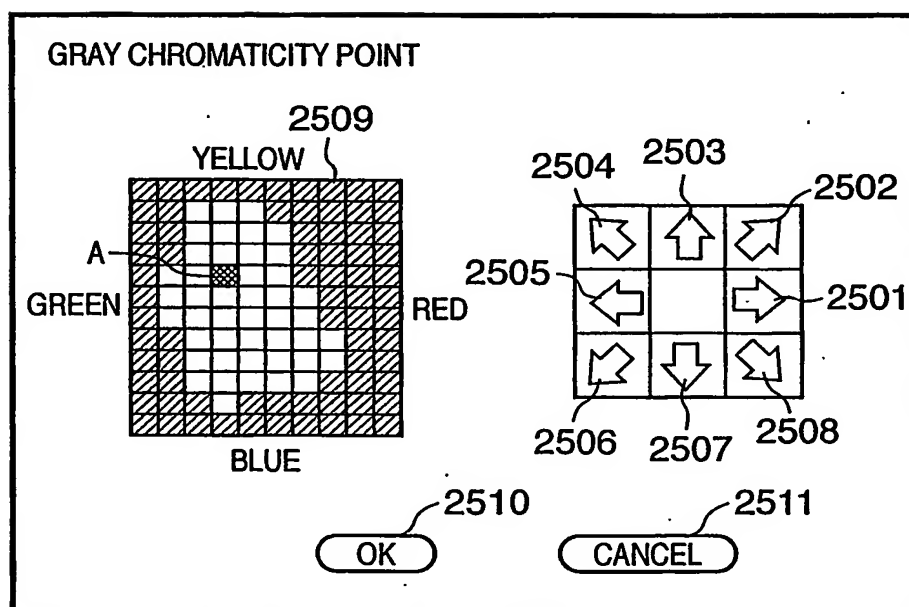


26/27

FIG. 26

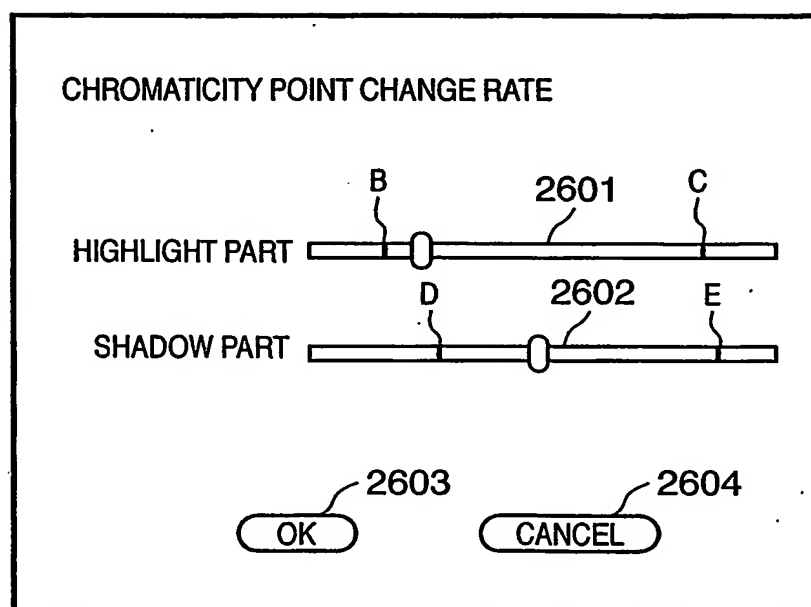

27/27

FIG. 27

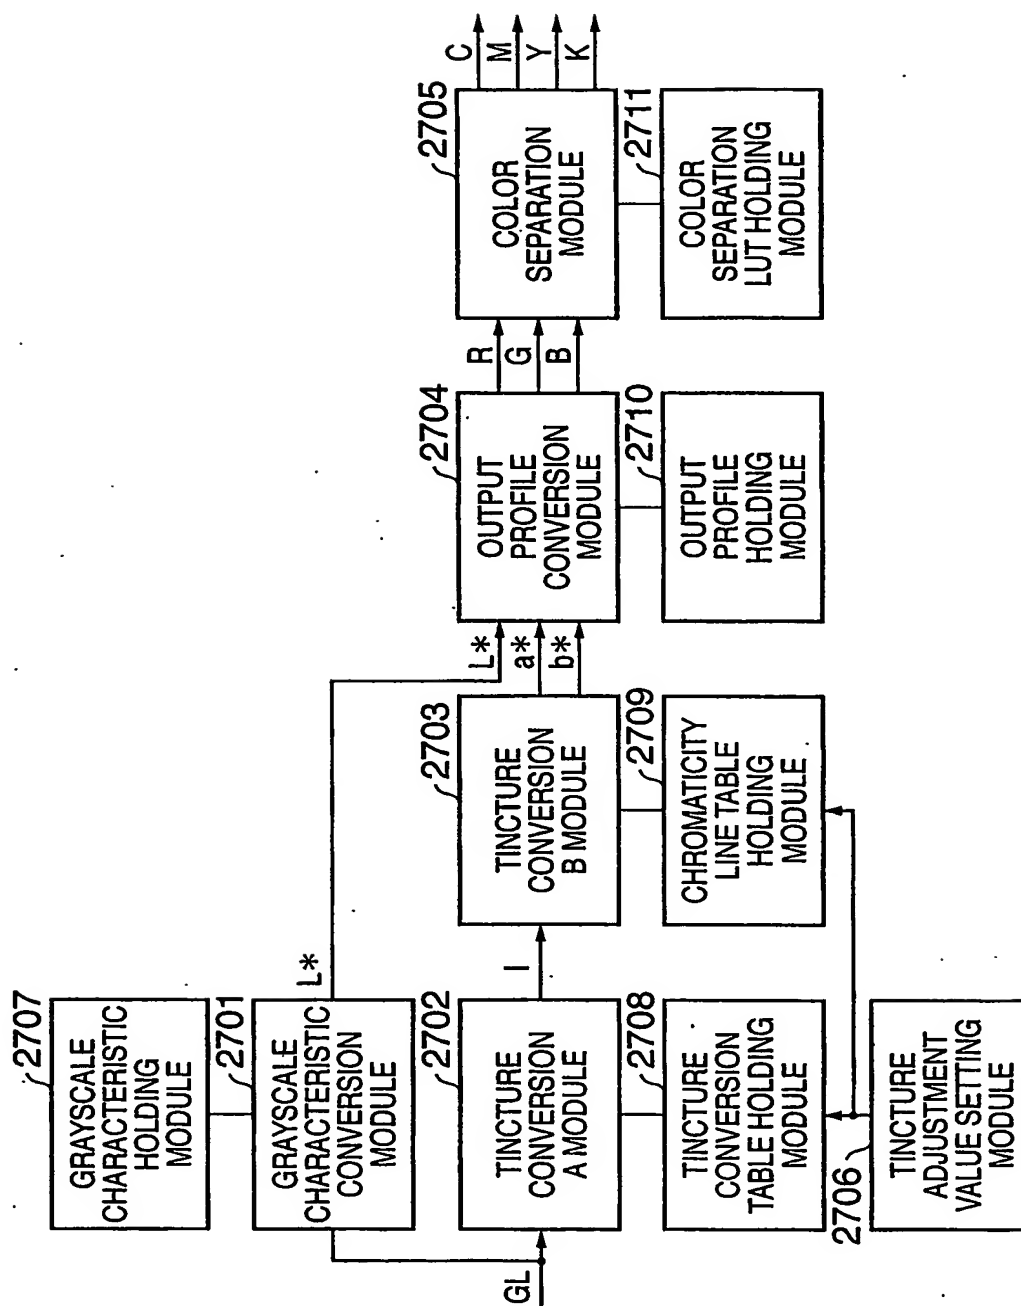

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP 2004/001145

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl.⁷ H04N 1/40, 1/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.⁷ H04N 1/40, 1/46

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 Japanese Utility Model Gazette 1922-1996, Japanese Publication of Unexamined Utility Model Applications 1971-2004, Japanese Registered Utility Model Gazette 1994-2004, Japanese Gazette Containing the Utility Model 1996-2004

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 11-355584 A (FUJI PHOTO FILM Co., Ltd.) 1999.12.24, page 5-6 (Family none)	1-3, 11-13, 21-23, 31-40
A	JP 11-45325 A (NIKON CORPORATION) 1999.2.16 (Family none)	1-40
A	JP 10-136213 A (NIPPON TELEGRAPH AND TELEPHONE CORPORATION) 1998.5.22 (Family none)	1-40
A	JP 2002-142121 A (ZEROX Co., Ltd.) 2002.5.17 & CA 2356813 A & EP 1187456 A2 & BR 104007 A	1-40



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28.04.2004

Date of mailing of the international search report

18.5.2004

Name and mailing address of the ISA/JP

Japan Patent Office

3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan

Authorized officer

AKIRA NAKAMA

5V

8834

Telephone No. +81-3-3581-1101 Ext. 3571